BIDDING DOCUMENTS

FOR THE

CONSTRUCTION OF CONCRETE DRAINAGE CANAL AT ZONE 2, SAGUR II,BARANGAY BALANGOBONG UNDERTAKEN THROUGH EARLY PROCUREMENT ACTIVITY

MUNICIPALITY OF LINGAYEN

Sixth Edition
July 2020

TABLE OF CONTENTS

GLOSSARY OF 4

TERMS, ABBREVIATIONS, AND ACRONYMS 4

SECTION I. INVITATION TO BID 7

SECTION II. INSTRUCTIONS TO BIDDERS (ITB) 10

1. Scope of Bid 10
2. Funding Information 10
3. Bidding Requirements 10
4. Corrupt, Fraudulent, Collusive, Coercive, and Obstructive Practices 10
5. Eligible Bidders 11
6. Bidder's Responsibilities 11
7. Origin of Associated Goods 12
8. Subcontracts 12
9. Pre-Bid Conference 12
10. Clarification and Amendment of Bidding Documents 12
11. Documents Comprising the Bid: Eligibility and Technical Components 12
12. Documents Comprising the Bid: Financial Component 13
13. Alternative Bids 13
14. Bid Prices 13
15. Bid and Payment Currencies 13
16. Bid Security 14
17. Sealing and Marking of Bids 14
18. Deadline for Submission of Bids 15
19. Opening and Preliminary Examination of Bids 15
20. Detailed Evaluation and Comparison of Bids 16
21. Post Qualification 16
22. Signing of the Contract 16

SECTION III. BID DATA SHEET (BDS) 17

SECTION IV. GENERAL CONDITIONS OF CONTRACT 19

1. Scope of Contract 19
2. Sectional Completion of Works 19
3. Possession of Site 19
4. The Contractor's Obligations 20

5. Performance Security 20
6. Site Investigation Reports 20
7. Warranty 20
8. Liability of the Contractor 21
9. Termination for Other Causes 21
10. Dayworks 21
11. Program of Work 21
12. Instructions, Inspections and Audits 21
13. Advance Payment 21
14. Progress Payments 22
15. Operating and Maintenance Manuals 22

SECTION V. SPECIAL CONDITIONS OF CONTRACT 23

SECTION VI. SPECIFICATIONS 24

SECTION VII. DRAWING 48

SECTION VIII. BILL OF QUANTITIES 49

BILL OF QUANTITIES 49

SECTION IX. CHECKLIST OF TECHNICAL AND FINANCIAL DOCUMENTS 50

SECTION XI. BID FORMS 53

Glossary of Terms, Abbreviations, and Acronyms

ABC –Approved Budget for the Contract.

ARCC – Allowable Range of Contract Cost.

BAC – Bids and Awards Committee.

Bid – A signed offer or proposal to undertake a contract submitted by a bidder in response to and in consonance with the requirements of the bidding documents. Also referred to as *Proposal* and *Tender*. (2016 revised IRR, Section 5[c])

Bidder – Refers to a contractor, manufacturer, supplier, distributor and/or consultant who submits a bid in response to the requirements of the Bidding Documents. (2016 revised IRR, Section 5[d])

Bidding Documents – The documents issued by the Procuring Entity as the bases for bids, furnishing all information necessary for a prospective bidder to prepare a bid for the Goods, Infrastructure Projects, and/or Consulting Services required by the Procuring Entity. (2016 revised IRR, Section 5[e])

BIR – Bureau of Internal Revenue.

BSP – Bangko Sentral ng Pilipinas.

CDA – Cooperative Development Authority.

Consulting Services – Refer to services for Infrastructure Projects and other types of projects or activities of the GOP requiring adequate external technical and professional expertise that are beyond the capability and/or capacity of the GOP to undertake such as, but not limited to: (i) advisory and review services; (ii) pre-investment or feasibility studies; (iii) design; (iv) construction supervision; (v) management and related services; and (vi) other technical services or special studies. (2016 revised IRR, Section 5[i])

Contract – Refers to the agreement entered into between the Procuring Entity and the Supplier or Manufacturer or Distributor or Service Provider for procurement of Goods and Services; Contractor for Procurement of Infrastructure Projects; or Consultant or Consulting Firm for Procurement of Consulting Services; as the case may be, as recorded in the Contract Form signed by the parties, including all attachments and appendices thereto and all documents incorporated by reference therein.

Contractor – is a natural or juridical entity whose proposal was accepted by the Procuring Entity and to whom the Contract to execute the Work was awarded. Contractor as used in these Bidding Documents may likewise refer to a supplier, distributor, manufacturer, or consultant.

CPI – Consumer Price Index.

DOLE – Department of Labor and Employment.

DTI – Department of Trade and Industry.

Foreign-funded Procurement or Foreign-Assisted Project –Refers to procurement whose funding source is from a foreign government, foreign or international financing institution as specified in the Treaty or International or Executive Agreement. (2016 revised IRR, Section 5[b]).

GFI – Government Financial Institution.

GOCC –Government-owned and/or –controlled corporation.

Goods – Refer to all items, supplies, materials and general support services, except Consulting Services and Infrastructure Projects, which may be needed in the transaction of public businesses or in the pursuit of any government undertaking, project or activity, whether in the nature of equipment, furniture, stationery, materials for construction, or personal property of any kind, including non-personal or contractual services such as the repair and maintenance of equipment and furniture, as well as trucking, hauling, janitorial, security, and related or analogous services, as well as procurement of materials and supplies provided by the Procuring Entity for such services. The term "related" or "analogous services" shall include, but is not limited to, lease or purchase of office space, media advertisements, health maintenance services, and other services essential to the operation of the Procuring Entity. (2016 revised IRR, Section 5[r])

GOP – Government of the Philippines.

Infrastructure Projects – Include the construction, improvement, rehabilitation, demolition, repair, restoration or maintenance of roads and bridges, railways, airports, seaports, communication facilities, civil works components of information technology projects, irrigation, flood control and drainage, water supply, sanitation, sewerage and solid waste management systems, shore protection, energy/power and electrification facilities, national buildings, school buildings, hospital buildings, and other related construction projects of the government. Also referred to as *civil works or works*. (2016 revised IRR, Section 5[u])

LGUs – Local Government Units.

NFCC – Net Financial Contracting Capacity.

NGA – National Government Agency.

PCAB – Philippine Contractors Accreditation Board.

PhilGEPS - Philippine Government Electronic Procurement System.

Procurement Project – refers to a specific or identified procurement covering goods, infrastructure project or consulting services. A Procurement Project shall be described, detailed, and scheduled in the Project Procurement Management Plan prepared by the agency which shall be consolidated in the procuring entity's Annual Procurement Plan. (GPPB Circular No. 06-2019 dated 17 July 2019)

PSA – Philippine Statistics Authority.

SEC – Securities and Exchange Commission.

SLCC – Single Largest Completed Contract.

UN – United Nations.

Section I. Invitation to Bid

Republic of the Philippines
Province of Pangasinan
Municipality of Lingayen

Invitation to Bid for *the CONSTRUCTION OF CONCRETE DRAINAGE CANAL AT ZONE 2, SAGUR II, BARANGAY BALANGOBONG UNDERTAKEN THROUGH EARLY PROCUREMENT ACTIVITY*

The ***Local Government Unit (LGU) of Lingayen*** through the General Fund- 20% Development Fund intends to apply the sum of ***Five Hundred Thousand Pesos (P500,000.00) only*** being the Approved Budget for the Contract (ABC) to payments under the contract for *the* ***CONSTRUCTION OF CONCRETE DRAINAGE CANAL AT ZONE 2, SAGUR II, BARANGAY BALANGOBONG UNDERTAKEN THROUGH EARLY PROCUREMENT ACTIVITY with Purchase Request no. 100-24-11-804.*** Bids received in excess of the ABC shall be automatically rejected at bid opening.

The ***Local Government Unit (LGU) of Lingayen*** now invites bids for the above Procurement Project. Completion of the Works is required *sixty (60) CALENDAR days*. Bidders should have completed a contract similar to the Project. The description of an eligible bidder is contained in the Bidding Documents, particularly, in Section II (Instructions to Bidders).

Bidding will be conducted through open competitive bidding procedures using non-discretionary "*pass/fail*" criterion as specified in the 2016 revised Implementing Rules and Regulations (IRR) of Republic Act (RA) No. 9184.

Interested bidders may obtain further information from *BAC Office, Municipal Hall Building, Lingayen, Pangasinan* from 8*:00 in the morning to 5:00 in the afternoon, Mondays to FRIDAYS except holidays.*

A complete set of Bidding Documents may be acquired by interested bidders starting ***November 29, 2024 – December 26, 2024 from*** the BAC Office, Municipal Hall Building, Lingayen, Pangasinan *and upon payment of the applicable fee for the Bidding Documents, pursuant to the latest Guidelines issued by the GPPB, in the amount of* ***Five Hundred Pesos (P500.00) Only.*** The Bidder or authorize representative shall present its proof of payment for the fees personally to the BAC Office before Bidding Documents will be released.

The ***Local Government Unit of Lingayen*** will hold a Pre-Bid Conference on December 11, *2024, 10:30 in the morning* at *Municipal Conference Room, Municipal Hall, Building, Lingayen, Pangasinan.* Prospective bidders are highly encouraged to attend the Pre- Bid Conference.

Bids must be duly received by the BAC Secretariat through manual submission at the office of Bids and Awards Committee, Local Government Unit of Lingayen, Municipal Hall, Lingayen, Pangasinan 2401 on or before 9:00 in the morning, December 26, 2024. Late bids shall not be accepted.

All bids must be accompanied by a Bid Security in any of the acceptable forms and in the amount stated in **ITB** Clause 15.

Bid opening shall be at the Municipal Conference Hall, 2nd Floor, Municipal Hall Building, Lingayen, Pangasinan on **December 26, 2024**, *after the closing time of the submission of bids*. Bids will be opened in the presence of the bidders' representatives and observers who choose to attend the activity.

This Procurement is undertaken through Early Procurement Activities (EPA).

Thus, this Early Procurement shall be governed by the GPPB Circular No. 06-2019 dated July 17, 2019, which shall include, but not limited to the:

a. Rules and procedure of EPA:

   The conduct of EPA from posting to recommendation of the BAC to the HoPE as to the award of the contract shall observe the mandatory timeliness set forth in the 2016 revised Implementing the Rules and Regulations (IRR) of Republic Act No. (RA) No. 9184, including the period for re-bidding which shall be within fifteen (15) days after each declaration of failure of bidding, which may be extended up to thirty (30) days upon approval of the HoPE.

b. Fixed price rule in procurement

   No change shall be made on the Contract Price by reason of escalation in currency. Any adjustment in Contract Price shall be done in accordance with guidelines provided by law.

c. Extension of the bid validity and security

   The validity of their bidder's bid securities shall be beyond one hundred twenty (120) calendar days, prior to their expiration, if the funding source for the Procurement Project has yet to be approved and made effective. A change in the form of the bid security is allowed if this is made of prior to the expiration of the bid validity sought to be extended. If the bidder refuses to extend the bid validity, the Local Government Unit of Lingayen shall reject the bid submitted by said bidder.

d. Validity of the eligibility requirements must be confirmed prior to the award of contract.

e. Conditions of award:

i. Procurement Project undertaken through EPA may be awarded upon approval and effectivity of the appropriations ordinance, regardless of the posted ABC.
ii. If the amount authorized for a Procurement Project has been reduced, the Procuring Entity may still make an award if the contract price to be awarded is within the amount authorized in the appropriations ordinance regardless of the posted ABC.
iii. The Hope shall not award any Procurement Project if the amount therefore has been withdrawn or in the event the amount authorized in the appropriations ordinance is lower than the amount of contract to be awarded.
iv. In all instances, the HoPE has the authority to exercise the reservation clause under Section 41 of RA No. 9174, which grants the HoPE the right not to award the contract if, for any justifiable and reasonable ground, the award of the contract will not redound to the benefit of the government.

f. The date of earliest completion of work shall be sixty (60) days.

The ***Local Government Unit of Lingayen*** reserves the right to reject any and all bids, declare a failure of bidding, or not award the contract at any time prior to contract award in accordance with Sections 35.6 and 41 of the 2016 revised Implementing Rules and Regulations (IRR) of RA No. 9184, without thereby incurring any liability to the affected bidder or bidders.

Any provision in the Instruction to Bidders that is not complied with shall be a ground for disqualification, except when allowed by R.A. 9184, its Implementing Rules and Regulations or pertinent GPPB Resolutions.

For further information, please refer to:

SHARON S. SISON
Head BAC Secretariat
LGU Lingayen
Barangay Poblacion
Lingayen, Pangasinan

You may visit the following websites:

For downloading of Bidding Documents:*www.lingayen.gov.ph*

November 29, 2024
Date of Issue

JOAN JUDE R. LOPEZ, LLB. MDM.
BAC Chairperson

Section II. Instructions to Bidders (ITB)

1. Scope of Bid

The Procuring Entity, *the Local Government Unit of Lingayen* invites Bids for **the *CONSTRUCTION OF CONCRETE DRAINAGE CANAL AT ZONE 2 SAGUR II, BARANGAY BALANGOBONG UNDERTAKEN THROUGH EARLY PROCUREMENT ACTIVITY with Purchase* Request No. 100-24-11-804.**

The Procurement Project (referred to herein as "Project") is for the *Construction of Concrete Drainage Canal* as described in Section VI (Specifications).

2. Funding Information

2.1. The GOP through the source of funding as indicated below for *CY 2025* in the amount of *Five Hundred Thousand Pesos (P500,000.00) Only.*

2.2. The source of funding is: LGU's General Fund particularly the 20% Development Fund

3. Bidding Requirements

The Bidding for the Project shall be governed by all the provisions of RA No. 9184 and its 2016 revised IRR, including its Generic Procurement Manual and associated policies, rules and regulations as the primary source thereof, while the herein clauses shall serve as the secondary source thereof.

Any amendments made to the IRR and other GPPB issuances shall be applicable only to the ongoing posting, advertisement, or invitation to bid by the BAC through the issuance of a supplemental or bid bulletin.

The Bidder, by the act of submitting its Bid, shall be deemed to have inspected the site, determined the general characteristics of the contracted Works and the conditions for this Project, such as the location and the nature of the work; (b) climatic conditions; (c) transportation facilities; (c) nature and condition of the terrain, geological conditions at the site communication facilities, requirements, location and availability of construction aggregates and other materials, labor, water, electric power and access roads; and (d) other factors that may affect the cost, duration and execution or implementation of the contract, project, or work and examine all instructions, forms, terms, and project requirements in the Bidding Documents.

4. Corrupt, Fraudulent, Collusive, Coercive, and Obstructive Practices

The Procuring Entity, as well as the Bidders and Contractors, shall observe the highest standard of ethics during the procurement and execution of the contract. They or through

an agent shall not engage in corrupt, fraudulent, collusive, coercive, and obstructive practices defined under Annex "I" of the 2016 revised IRR of RA No. 9184 or other integrity violations in competing for the Project.

5. Eligible Bidders

5.1. Only Bids of Bidders found to be legally, technically, and financially capable will be evaluated.

5.2. The Bidder must have an experience of having completed a Single Largest Completed Contract (SLCC) that is similar to this Project, equivalent to at least fifty percent (50%) of the ABC adjusted, if necessary, by the Bidder to current prices using the PSA's CPI, except under conditions provided for in Section 23.4.2.4 of the 2016 revised IRR of RA No. 9184.

A contract is considered to be "similar" to the contract to be bid if it has the major categories of work stated in the **BDS**.

5.3. The Bidders shall comply with the eligibility criteria under Section 23.4.2 of the 2016 IRR of RA No. 9184.

6. Bidder's Responsibilities

6.1 The Bidder is responsible for the following:

(a) Having acknowledged all conditions, local or otherwise, affecting the implementation of the contract;

(b) Having complied with its responsibility to inquire or secure Supplemental/Bid Bulletin(s).

(c) Ensuring that it is not "blacklisted" or barred from bidding by the GOP or any of its agencies, offices, corporations, or LGUs, including foreign government/foreign or international financing institution whose blacklisting rules have been recognized by the GPPB;

(d) Ensuring that each of the documents submitted in satisfaction of the bidding requirements is an authentic copy of the original, complete, and all statements and information provided therein are true and correct;

(e) Ensuring that the signatory is the duly authorized representative of the Bidder, and granted full power and authority to do, execute and perform any and all acts necessary and/or to represent the Bidder in the bidding, with the duly notarized Secretary's Certificate attesting to such fact, if the Bidder is a corporation, partnership, cooperative, or joint venture;

(f) Complying with the disclosure provision under Section 47 of RA 9184 and its IRR in relation to other provisions of RA 3019;

6.2 The Bidder is expected to examine all instructions, forms, terms, and specifications in the Bidding Documents.

6.3 The Procuring Entity shall not assume any responsibility regarding erroneous interpretations or conclusions by the prospective or eligible bidder out of the data furnished by the procuring entity.

6.4 Before submitting their bids, the Bidder is deemed to have become familiar with all existing laws, decrees, ordinances, acts and regulations of the Philippines which may affect this Project in any way.

6.5 The Bidder should note that the Procuring Entity will accept bids only from those that have paid the applicable fees for the Bidding Documents at the office indicated in the Invitation to Bid.

7. Origin of Associated Goods

There is no restriction on the origin of Goods other than those prohibited by a decision of the UN Security Council taken under Chapter VII of the Charter of the UN.

8. Subcontracts

The Procuring Entity has prescribed that:

a. Subcontracting is not allowed.

9. Pre-Bid Conference

The Procuring Entity will hold a pre-bid conference is on ***December 11, 2024, 10:30*** in the morning at Municipal Conference Room, Municipal Hall Building, Lingayen, Pangasinan**.**

10. Clarification and Amendment of Bidding Documents

Prospective bidders may request for clarification on and/or interpretation of any part of the Bidding Documents. Such requests must be in writing and received by the Procuring Entity, either at its given address or through electronic mail indicated in the **IB**, at least ten (10) calendar days before the deadline set for the submission and receipt of Bids.

11. Documents Comprising the Bid: Eligibility and Technical Components

11.1 The first envelope shall contain the eligibility and technical documents of the Bid as specified in **Section IX. Checklist of Technical and Financial Documents**.

11.2 If the eligibility requirements or statements, the bids, and all other documents for submission to the BAC are in foreign language other than English, it must be accompanied by a translation in English, which shall be authenticated by the appropriate Philippine foreign service establishment, post, or the equivalent office having jurisdiction over the foreign bidder's affairs in the Philippines. For Contracting Parties to the Apostille Convention, only the translated documents shall be authenticated through an apostille pursuant to GPPB Resolution No. 13-

11.32019 dated 23 May 2019. The English translation shall govern, for purposes of interpretation of the bid.

11.4A valid PCAB License is required, and in case of joint ventures, a valid special PCAB License, and registration for the type and cost of the contract for this Project. Any additional type of Contractor license or permit shall be indicated in the **BDS**.

11.4.A List of Contractor's key personnel (e.g., Project Manager, Project Engineers, Materials Engineers, and Foremen) assigned to the contract to be bid, with their complete qualification and experience data shall be provided. These key personnel must meet the required minimum years of experience set in the **BDS**.

11.5A List of Contractor's major equipment units, which are owned, leased, and/or under purchase agreements, supported by proof of ownership, certification of availability of equipment from the equipment lessor/vendor for the duration of the project, as the case may be, must meet the minimum requirements for the contract set in the **BDS**.

12. Documents Comprising the Bid: Financial Component

12.1The second bid envelope shall contain the financial documents for the Bid as specified in **Section IX. Checklist of Technical and Financial Documents**.

12.2Any bid exceeding the ABC indicated in paragraph 1 of the **IB** shall not be accepted.

13. Alternative Bids

Bidders shall submit offers that comply with the requirements of the Bidding Documents, including the basic technical design as indicated in the drawings and specifications. Unless there is a value engineering clause in the **BDS**, alternative Bids shall not be accepted.

14. Bid Prices

All bid prices for the given scope of work in the Project as awarded shall be considered as fixed prices, and therefore not subject to price escalation during contract implementation, except under extraordinary circumstances as determined by the NEDA and approved by the GPPB pursuant to the revised Guidelines for Contract Price Escalation guidelines.

15. Bid and Payment Currencies

15.1Bid prices may be quoted in the local currency or tradeable currency accepted by the BSP at the discretion of the Bidder. However, for purposes of bid evaluation, Bids denominated in foreign currencies shall be converted to Philippine currency based on the exchange rate as published in the BSP reference rate bulletin on the day of the bid opening.

15.2Payment of the contract price shall be made in:

a. Philippine Pesos.

16. Bid Security

16.1 The Bidder shall submit a Bid Securing Declaration or any form of Bid Security in the amount indicated in the **Bid Data Sheet (BDS)**, which shall be not less than the percentage of the ABC in accordance with the following schedule.

Form of Bid Security	Amount of Bid Security (Not Less than the Percentage of the ABC)
a. Cash or cashier's/manager's check issued by a Universal or Commercial Bank. *For biddings conducted by LGUs, the Cashier's/Manager's Check may be issued by other banks certified by the BSP as authorized to issue such financial instrument.*	Two percent (2%)
b. Bank draft/guarantee or irrevocable letter of credit issued by a Universal or Commercial Bank: Provided, however, that it shall be confirmed or authenticated by a Universal or Commercial Bank, if issued by a foreign bank. *For biddings conducted by LGUs, Bank Draft/Guarantee, or Irrevocable Letter of Credit may be issued by other banks certified by the BSP as authorized to issue such financial instrument.*	
c. Surety bond callable upon demand issued by a surety or insurance company duly certified by the Insurance Commission as authorized to issue such security.	Five percent (5%)

16.2 The Bid and bid security shall be valid until ***one hundred twenty days upon the date of opening of bids.*** Any bid not accompanied by an acceptable bid security shall be rejected by the Procuring Entity as non-responsive.

17. Sealing and Marking of Bids

Each Bidder shall submit one original copy and additional copy of the technical and financial components of its bid.

Bidders shall enclose the original copy of their technical documents in one long brown envelope marked "ORIGINAL – TECHNICAL DOCUMENTS", and shall do the same to the original copy of the financial components of their bid; marked "ORIGINAL – FINANCIAL DOCUMENTS" on a long brown envelope as well. These two brown envelopes shall be sealed in a long brown envelope marked "**ORIGINAL BID**".

The other copy of the Technical and Financial Documents shall be similarly sealed on a long brown envelope duly marked as "COPY – TECHNICAL DOCUMENT" and "COPY – FINANCIAL DOCUMENT" enclosed in a long brown envelope marked "**COPY BID**".

The checklist of Technical and Financial Documents shall be attached on the back side (under the seal flap) of each long brown envelope.

All of the documents (original copy and the other copy) shall bear the signature or initials of the authorized representative on every page as proof of its authenticity.

These two long brown envelopes (ORIGINAL BID and COPY) shall now be enclosed in one final expanding envelope properly marked and sealed with affixed signature of bidder.

All envelopes (long brown and expanding) shall:

a.) contain the name of the contract to be bid in capital letters;

b.) bear the name and address of the bidder in capital letters;

c.) be addressed to the Procuring Entity's BAC as follows;

BIDS AND AWARDS COMMITTEE
LOCAL GOVERNMENT UNIT OF LINGAYEN
MUNICIPAL HALL, LINGAYEN, PANGASINAN 2401

d.) bear a warning "DO NOT OPEN BEFORE…" the date and time of the Opening of Bids written at the front side of each envelope.

18. Deadline for Submission of Bids

The deadline of submission of Bids is on December 26, 2024 at exactly 9:00 in the morning. Only manual submission of Bids is allowed.

19. Opening and Preliminary Examination of Bids

19.1 The BAC shall open the Bids in public on ***December 26, 2024, after the closing time of the submission of bids at Municipal Conference Hall, 2nd Floor, Municipal Hall Building, Lingayen, Pangasinan***. The Bidders' authorize representatives who are present must present their Special Power of Attorney (SPA) and shall sign a register evidencing their attendance.

In case the Bids cannot be opened as scheduled due to justifiable reasons, the rescheduling requirements under Section 29 of the 2016 revised IRR of RA No. 9184 shall prevail.

19.2 The preliminary examination of Bids shall be governed by Section 30 of the 2016 revised IRR of RA No. 9184.

20. Detailed Evaluation and Comparison of Bids

20.1 The Procuring Entity's BAC shall immediately conduct a detailed evaluation of all Bids rated "*passed*" using non-discretionary pass/fail criteria. The BAC shall consider the conditions in the evaluation of Bids under Section 32.2 of 2016 revised IRR of RA No. 9184.

20.2 If the Project allows partial bids, all Bids and combinations of Bids as indicated in the **BDS** shall be received by the same deadline and opened and evaluated simultaneously so as to determine the Bid or combination of Bids offering the lowest calculated cost to the Procuring Entity. Bid Security as required by **ITB** Clause 16 shall be submitted for each contract (lot) separately.

20.3 In all cases, the NFCC computation pursuant to Section 23.4.2.6 of the 2016 revised IRR of RA No. 9184 must be sufficient for the total of the ABCs for all the lots participated in by the prospective Bidder.

21. Post Qualification

Within a non-extendible period of five (5) calendar days from receipt by the Bidder of the notice from the BAC that it submitted the Lowest Calculated Bid, the Bidder shall submit its latest income and business tax returns filed and paid through the BIR Electronic Filing and Payment System (eFPS), and other appropriate licenses and permits required by law and stated in the **BDS**. Subject to GPPB Circular No. 03-2012 dated August 17, 2012.

22. Signing of the Contract

The documents required in Section 37.2 of the 2016 revised IRR of RA No. 9184 shall form part of the Contract. Additional Contract documents are indicated in the **BDS**.

The winning bidder shall obtain a Mayor's Permit from the Municipality of Lingayen upon receipt of the Notice of Award and prior to the signing of the Contract.

Section III. Bid Data Sheet (BDS)

.

Bid Data Sheet

<table>
<tr><th>ITB Clause</th><th></th></tr>
<tr><td>5.2</td><td>For this purpose, contracts similar to the Project refer to contracts which have the same major categories of work, which shall be consist of:

OTHER GENERAL REQUIREMENTS
I. Project Billboards
II. Construction Health and Safety
CIVIL WORKS
III. Structure Excavation
IV. Gravel Fill
V. Concrete Works
VI. Reinforcing Steel & Wire Rope
VII. Forms & Falseworks</td></tr>
<tr><td>&</td><td>Sub-contracting is not allowed</td></tr>
<tr><td>10.3</td><td>PCAB, DTI, Mayor’s Permit</td></tr>
<tr><td>10.4</td><td>The contractor shall employ the following Key Personnel
General Experience
Project Engineer — Vertical and Horizontal Projects
Materials Engineer — Vertical and Horizontal Projects
Construction Foreman — Vertical and Horizontal projects
Skilled Laborer
Partime Safety Practitioner
First Aider
Unskilled Laborer</td></tr>
<tr><td>10.5</td><td>The minimum major equipment requirements are the following:
<table>
<tr><th>Equipment</th><th>Capacity</th><th>No. of units</th></tr>
<tr><td>Dump Truck</td><td>10 cu.m.</td><td>one (1)</td></tr>
<tr><td>Backhoe</td><td>0.80 cu.m.</td><td>one (1)</td></tr>
<tr><td>Backhoe with breaker</td><td>0.80 cu.m.</td><td>One (1)</td></tr>
<tr><td>Concrete saw, blade dia. 14”</td><td>All reqd.</td><td>one (1)</td></tr>
<tr><td>Plate Compactor</td><td>5hp</td><td>one (1)</td></tr>
<tr><td>Water Pump</td><td>100mm suction diameter</td><td>one (1)</td></tr>
</table></td></tr>
</table>

	One bagger mixer	One bagger	one (1)	
	Concrete vibrator	All reqd.	one (1)	
	Minor tools	All reqd.	one (1)	
12	*Value Engineering clause not included. Alternative bids shall not be included.*			
15.1	The bid security shall be in the form of a Bid Securing Declaration or any of the following forms and amounts: a. The amount of not less than ***Ten Thousand Pesos (P10,000.00) Only*** *two percent (2%) of ABC],* if bid security is in cash, cashier's/manager's check, bank draft/guarantee or irrevocable letter of credit; b. The amount of not less than ***Twenty Five Thousand Pesos (P25,000.00) Only*** *five percent (5%) of ABC]* if bid security is in Surety Bond.			
19.2	Partial bids is not allowed .			
20	*Pertinent documents to be submitted by the winning supplier to the BAC Office before the issuance of Notice of Award* *1. Philgeps Certificate* *2. Mayor's Permit* *3. Latest Income and Business Tax Return* *4. Tax Clearance*			
21	Additional contract documents relevant to the Project that may be required by existing laws and/or the Procuring Entity, such as construction schedule and S-curve, manpower schedule, construction methods, equipment utilization schedule, construction safety and health program approved by the DOLE, and other acceptable tools of project scheduling.			

Section IV. General Conditions of Contract

1. Scope of Contract

This Contract shall include all such items, although not specifically mentioned, that can be reasonably inferred as being required for its completion as if such items were expressly mentioned herein. All the provisions of RA No. 9184 and its 2016 revised IRR, including the Generic Procurement Manual, and associated issuances, constitute the primary source for the terms and conditions of the Contract, and thus, applicable in contract implementation. Herein clauses shall serve as the secondary source for the terms and conditions of the Contract.

This is without prejudice to Sections 74.1 and 74.2 of the 2016 revised IRR of RA No. 9184 allowing the GPPB to amend the IRR, which shall be applied to all procurement activities, the advertisement, posting, or invitation of which were issued after the effectivity of the said amendment.

2. Sectional Completion of Works

If sectional completion is specified in the **Special Conditions of Contract (SCC)**, references in the Conditions of Contract to the Works, the Completion Date, and the Intended Completion Date shall apply to any Section of the Works (other than references to the Completion Date and Intended Completion Date for the whole of the Works).

3. Possession of Site

3.1 The Procuring Entity shall give possession of all or parts of the Site to the Contractor based on the schedule of delivery indicated in the **SCC,** which corresponds to the execution of the Works. If the Contractor suffers delay or incurs cost from failure on the part of the Procuring Entity to give possession in accordance with the terms of this clause, the Procuring Entity's Representative shall give the Contractor a Contract Time Extension and certify such sum as fair to cover the cost incurred, which sum shall be paid by Procuring Entity.

3.2 If possession of a portion is not given by the above date, the Procuring Entity will be deemed to have delayed the start of the relevant activities. The resulting adjustments in contract time to address such delay may be addressed through contract extension provided under Annex "E" of the 2016 revised IRR of RA No. 9184.

4. The Contractor's Obligations

The Contractor shall employ the key personnel named in the Schedule of Key Personnel indicating their designation, in accordance with **ITB** Clause 10.3 and specified in the **BDS**, to carry out the supervision of the Works.

The Procuring Entity will approve any proposed replacement of key personnel only if their relevant qualifications and abilities are equal to or better than those of the personnel listed in the Schedule.

5. Performance Security

5.1. Within ten (10) calendar days from receipt of the Notice of Award from the Procuring Entity but in no case later than the signing of the contract by both parties, the successful Bidder shall furnish the performance security in any of the forms prescribed in Section 39 of the 2016 revised IRR.

5.2. The Contractor, by entering into the Contract with the Procuring Entity, acknowledges the right of the Procuring Entity to institute action pursuant to RA No. 3688 against any subcontractor be they an individual, firm, partnership, corporation, or association supplying the Contractor with labor, materials and/or equipment for the performance of this Contract.

6. Site Investigation Reports

The Contractor, in preparing the Bid, shall rely on any Site Investigation Reports referred to in the **SCC** supplemented by any information obtained by the Contractor.

7. Warranty

7.1. In case the Contractor fails to undertake the repair works under Section 62.2.2 of the 2016 revised IRR, the Procuring Entity shall forfeit its performance security, subject its property(ies) to attachment or garnishment proceedings, and perpetually disqualify it from participating in any public bidding. All payables of the GOP in his favor shall be offset to recover the costs.

7.2. The warranty against Structural Defects/Failures, except that occasioned-on force majeure, shall cover the period from the date of issuance of the Certificate of Final Acceptance by the Procuring Entity. Specific duration of the warranty is found in the **SCC**.

7.3. Retention Money: Progress payments are subject to retention of ten percent (10%) referred to as the retention money. Such retention shall be based on the total amount due to the contractor prior to any deduction and shall be retained from every progress payment. The total retention money shall be due for release upon final acceptance of the works

8. Liability of the Contractor

Subject to additional provisions, if any, set forth in the **SCC**, the Contractor's liability under this Contract shall be as provided by the laws of the Republic of the Philippines.

If the Contractor is a joint venture, all partners to the joint venture shall be jointly and severally liable to the Procuring Entity.

9. Termination for Other Causes

Contract termination shall be initiated in case it is determined *prima facie* by the Procuring Entity that the Contractor has engaged, before, or during the implementation of the contract, in unlawful deeds and behaviors relative to contract acquisition and implementation, such as, but not limited to corrupt, fraudulent, collusive, coercive, and obstructive practices as stated in **ITB** Clause 4.

10. Dayworks

Subject to the guidelines on Variation Order in Annex "E" of the 2016 revised IRR of RA No. 9184, and if applicable as indicated in the **SCC**, the Dayworks rates in the Contractor's Bid shall be used for small additional amounts of work only when the Procuring Entity's Representative has given written instructions in advance for additional work to be paid for in that way.

11. Program of Work

11.1. The Contractor shall submit to the Procuring Entity's Representative for approval the said Program of Work showing the general methods, arrangements, order, and timing for all the activities in the Works. The submissions of the Program of Work are indicated in the **SCC.**

11.2. The Contractor shall submit to the Procuring Entity's Representative for approval an updated Program of Work at intervals no longer than the period stated in the **SCC.** If the Contractor does not submit an updated Program of Work within this period, the Procuring Entity's Representative may withhold the amount stated in the **SCC** from the next payment certificate and continue to withhold this amount until the next payment after the date on which the overdue Program of Work has been submitted.

12. Instructions, Inspections and Audits

The Contractor shall permit the GOP or the Procuring Entity to inspect the Contractor's accounts and records relating to the performance of the Contractor and to have them audited by auditors of the GOP or the Procuring Entity, as may be required.

13. Advance Payment

The Procuring Entity shall, upon a written request of the Contractor which shall be submitted as a Contract document, make an advance payment to the Contractor in an amount not exceeding fifteen percent (15%) of the total contract price, to be made in

lump sum, or at the most two installments according to a schedule specified in the **SCC**, subject to the requirements in Annex "E" of the 2016 revised IRR of RA No. 9184.

14. Progress Payments

The Contractor may submit a request for payment for Work accomplished. Such requests for payment shall be verified and certified by the Procuring Entity's Representative/Project Engineer. Except as otherwise stipulated in the **SCC**, materials and equipment delivered on the site but not completely put in place shall not be included for payment.

15. Operating and Maintenance Manuals

15.1. If required, the Contractor will provide "as built" Drawings and/or operating and maintenance manuals as specified in the **SCC.**

15.2. If the Contractor does not provide the Drawings and/or manuals by the dates stated above, or they do not receive the Procuring Entity's Representative's approval, the Procuring Entity's Representative may withhold the amount stated in the **SCC** from payments due to the Contractor.

Section V. Special Conditions of Contract

Special Conditions of Contract

GCC Clause	
2	*The Intended Completion Date is sixty **(60)** calendar days*
4.1	*The Local Government Unit of Lingayen shall give possession of all parts of the site to the contractor upon signing of the Contract.*
6	The site investigation reports are: *None*
7.2	*In case of semi-permanent structures, such as buildings of types 1, 2, and 3 as classified under the National Building Code of the Philippines, concrete/asphalt roads, concrete river control, drainage, irrigation lined canals, river landing, deep wells, rock causeway, pedestrian overpass, and other similar semi-permanent structures:]* Five (5) years.
10	Dayworks are applicable at the rate shown in the Contractor's original Bid.
11.1	The Contractor shall submit the Program of Work to the Procuring Entity's Representative within ***ten (10) calendar*** days of delivery of the Notice of Award.
11.2	The amount to be withheld for late submission of an updated Program of Work is ***ten percent (10%) of the contract amount***..
13	The amount of the advance payment is ***fifteen (15%) percent of the contract amount***
14	*Materials and equipment delivered on the site but not completely put in place shall be included for payment* ***Not Applicable***
15.1	The date by which "as built" drawings are required is *before final payment*
15.2	The amount to be withheld for failing to produce "as built" drawings and/or operating and maintenance manuals by the date required is *one (1) percent(1%) of the contract amount*.

Section VI. Specifications

Project: Construction of Concrete Drainage Canal undertaken through Early Procurement Activity

Location: Zone 2, Sagur II, Brgy. Balangobong, Lingayen, Pangasinan

APPROVED TECHNICAL SPECIFICATIONS

STRUCTURE EXCAVATION

ITEM 103 – STRUCTURE EXCAVATION

103.1 Description

This Item shall consist of the necessary excavation for foundation of bridges, culverts, underdrains, and other structures not otherwise provided for in the Specifications. Except as otherwise provided for pipe culverts, the backfilling of completed structures and the disposal of all excavated surplus materials, shall be in accordance with these Specifications and in reasonably close conformity with the Plans or as established by the Engineer.

This Item shall include necessary diverting of live streams, bailing, pumping, draining, sheeting, bracing, and the necessary construction of cribs and cofferdams, and furnishing the materials therefore, and the subsequent removal of cribs and cofferdams and the placing of all necessary backfill.

It shall also include the furnishing and placing of approved foundation fill material to replace unsuitable material encountered below the foundation elevation of structures.

No allowance will be made for classification of different types of material encountered.

103.2 Construction Requirements

103.2.1 Clearing and Grubbing

Prior to starting excavation operations in any area, all necessary clearing and grubbing in that area shall have been performed in accordance with Item 100, Clearing and Grubbing.

103.2.2 Excavation

1) General, all structures. The Contractor shall notify the Engineer sufficiently in advance of the beginning of any excavation so that cross-sectional elevations and measurements may be taken on the undisturbed ground. The natural ground adjacent to the structure shall not be disturbed without permission of the Engineer.

Trenches or foundation pits for structures or structure footings shall be excavated to the lines and grades or elevations shown on the Plans or as staked by the Engineer. They shall be of sufficient size to permit the placing of structures or structure footings of the full width and length shown. The elevations of the bottoms of footings, as shown on the Plans, shall be considered as approximate only and the Engineer may order, in writing, such changes in dimensions or elevations of footings as may be deemed necessary, to secure a satisfactory foundation.

Boulders, logs, and other objectionable materials encountered in excavation shall be removed.

After each excavation is completed, the Contractor shall notify the Engineer to that effect and no footing, bedding material or pipe culvert shall be placed until the Engineer has approved the depth of excavation and the character of the foundation material.

2) Structures other than pipe culverts. All rock or other hard foundation materials shall be cleaned of all loose materials, and cut to a firm surface, either level, stepped, or serrated as directed by the Engineer. All seams or crevices shall be cleaned and grouted. All loose and disintegrated rocks and thin strata shall be removed. When the footing is to rest on material other than rock, excavation to final grade shall not be made until just before the footing is to be placed. When the foundation material is soft or mucky or otherwise unsuitable, as determined by the Engineer, the Contractor shall remove the unsuitable material and backfill with approved granular material. This foundation fill shall be placed and compacted in 150 mm layers up to the foundation elevation.

When foundation piles are used, the excavation of each pit shall be completed before the piles are driven and any placing of foundation fill shall be done after the piles are driven. After the driving is completed, all loose and displaced materials shall be removed, leaving a smooth, solid bed to receive the footing.

3) Pipe Culverts. The width of the pipe trench shall be sufficient to permit satisfactory jointing of the pipe and thorough tamping of the bedding material under and around the pipe.

Where rock, hardpan, or other unyielding material is encountered, it shall be removed below the foundation grade for a depth of at least 300 mm or 4 mm for each 100 mm of fill over the top of pipe, whichever is greater, but not to exceed three-quarters of the vertical inside diameter of the pipe. The width of the excavation shall be at least 300 mm greater than the horizontal outside diameter of the pipe. The excavation below grade shall be backfilled with selected fine compressible material, such as silty clay or loam, and lightly compacted in layers not over 150 mm in uncompacted depth to form a uniform but yielding foundation.

Where a firm foundation is not encountered at the grade established, due to soft, spongy, or other unstable soil, such unstable soil under the pipe and for a width of at least one diameter on each side of the pipe shall be removed to the depth directed by the Engineer and replaced with approved granular foundation fill material properly compacted to provide adequate support for the pipe, unless other special construction methods are called for on the Plans.

The foundation surface shall provide a firm foundation of uniform density throughout the length of the culvert and, if directed by the Engineer, shall be cambered in the direction parallel to the pipe centerline.

Where pipe culverts are to be placed in trenches excavated in embankments, the excavation of each trench shall be performed after the embankment has been constructed to a plane parallel to the proposed profile grade and to such height above the bottom of the pipe as shown on the Plans or directed by the Engineer.

103.2.3 Utilization of Excavated Materials

All excavated materials, so far as suitable, shall be utilized as backfill or embankment. The surplus materials shall be disposed off in such manner as not to obstruct the stream or otherwise impair the efficiency or appearance of the structure. No excavated materials shall be deposited at any time so as to endanger the partly finished structure.

103.2.4 Cofferdams

Suitable and practically watertight cofferdams shall be used wherever water-bearing strata are encountered above the elevation of the bottom of the excavation. If requested, the Contractor shall submit drawings showing his proposed method of cofferdam construction, as directed by the Engineer.

Cofferdams or cribs for foundation construction shall in general, be carried well below the bottoms of the footings and shall be well braced and as nearly watertight as practicable. In general, the interior dimensions of cofferdams shall be such as to give sufficient clearance for the construction of forms and the inspection of their exteriors, and to permit pumping outside of the forms. Cofferdams or cribs which

are tilted or moved laterally during the process of sinking shall be righted or enlarged so as to provide the necessary clearance.

When conditions are encountered which, as determined by the Engineer, render it impracticable to dewater the foundation before placing the footing, the Engineer may require the construction of a concrete foundation seal of such dimensions as he may consider necessary, and of such thickness as to resist any possible uplift. The concrete for such seal shall be placed as shown on the Plans or directed by the Engineer. The foundation shall then be dewatered and the footing placed. When weighted cribs are employed and the mass is utilized to overcome partially the hydrostatic pressure acting against the bottom of the foundation seal, special anchorage such as dowels or keys shall be provided to transfer the entire mass of the crib to the foundation seal. When a foundation seal is placed under water, the cofferdams shall be vented or ported at low water level as directed.

Cofferdams shall be constructed so as to protect green concrete against damage from sudden rising of the stream and to prevent damage to the foundation by erosion. No timber or bracing shall be left in cofferdams or cribs in such a way as to extend into substructure masonry, without written permission from the Engineer.

Any pumping that may be permitted from the interior of any foundation enclosure shall be done in such a manner as to preclude the possibility of any portion of the concrete material being carried away. Any pumping required during the placing of concrete, or for a period of at least 24 hours thereafter, shall bedone from a suitable sump located outside the concrete forms. Pumping todewater a sealed cofferdam shall not commence until the seal has set sufficiently to withstand the hydrostatic pressure.

Unless otherwise provided, cofferdams or cribs, with all sheeting and bracing involved therewith, shall be removed by the Contractor after the completion of the substructure. Removal shall be effected in such manner as not to disturb or mar finished masonry.

103.2.5 Preservation of Channel

Unless otherwise permitted, no excavation shall be made outside of caissons, cribs, cofferdams, or sheet piling, and the natural stream bed adjacent to structure shall not be disturbed without permission from the Engineer. If any excavation or dredging is made at the side of the structure before caissons, cribs, or cofferdams are sunk in place, the Contractor shall, after the foundation base is in place, backfill all such excavations to the original ground surface or stream bed with material satisfactory to the Engineer.

103.2.6 Backfill and Embankment for Structures Other Than Pipe Culverts

Excavated areas around structures shall be backfilled with free draining granular material approved by the Engineer and placed in horizontal layers not over 150 mm in thickness, to the level of the original ground surface. Each layer shall be moistened or dried as required and thoroughly compacted with mechanical tampers.

In placing backfills or embankment, the material shall be placed simultaneously in so far as possible to approximately the same elevation on both sides of an abutment, pier, or wall. If conditions require placing backfill or embankment appreciably higher on one side than on the opposite side, the additional material on the higher side shall not be placed until the masonry has been in place for 14 days, or until tests made by the laboratory under the supervision of the Engineer establishes that the masonry has attained sufficient strength to withstand any pressure created by the methods used and materials placed without damage or strain beyond a safe factor.

Backfill or embankment shall not be placed behind the walls of concrete culverts or abutments or rigid frame structures until the top slab is placed and cured. Backfill and embankment behind abutments held at the top by the superstructure, and behind the sidewalls of culverts, shall be carried up simultaneously behind opposite abutments or sidewalls.

All embankments adjacent to structures shall be constructed in horizontal layers and compacted as prescribed in Subsection 104.3.3 except that mechanical tampers may be used for the required compaction. Special care shall be taken to prevent any wedging action against the structure, and slopes bounding or within the areas to be filled shall be benched or serrated to prevent wedge action. The placing of embankment and the benching of slopes shall continue in such a manner that at all times there will be horizontal berm of thoroughly compacted material for a distance at least equal to the height of the abutment or wall to be backfilled against except insofar as undisturbed material obtrudes upon the area.

Broken rock or coarse sand and gravel shall be provided for a drainage filter at weepholes as shown on the Plans.

103.2.7 Bedding, Backfill, and Embankment for Pipe Culverts

Bedding, Backfill and Embankment for pipe culverts shall be done in accordance with Item 500, Pipe Culverts and Storm Drains.

103.3 Method of Measurement

103.3.1 Structure Excavation

The volume of excavation to be paid for will be the number of cubic metres measured in original position of material acceptably excavated in conformity with the Plans or as directed by the Engineer, but in no case, except as noted, will any of the following volumes be included in the measurement for payment:

1) The volume outside of vertical planes 450 mm outside of and parallel to the neat lines of footings and the inside walls of pipe and pipe-arch culverts at their widest horizontal dimensions.

2) The volume of excavation for culvert and sections outside the vertical plane for culverts stipulated in (1) above.

3) The volume outside of neat lines of underdrains as shown on the Plans, and outside the limits of foundation fill as ordered by the Engineer.

4) The volume included within the staked limits of the roadway excavation, contiguous channel changes, ditches, etc., for which payment is otherwise provided in the Specification.

5) Volume of water or other liquid resulting from construction operations and which can be pumped or drained away.

6) The volume of any excavation performed prior to the taking of elevations and measurements of the undisturbed ground.

7) the volume of any material rehandled, except that where the Plans indicate or the Engineer directs the excavation after embankment has been placed and except that when installation of pipe culverts by the imperfect trench method specified in Item 500 is required, the volume of material re-excavated as directed will be included.

8) The volume of excavation for footings ordered at a depth more than 1.5 m below the lowest elevation for such footings shown on the original Contract Plans, unless the Bill of Quantities contains a pay item for excavation ordered below the elevations shown on the Plans for individual footings.

103.3.2 Bridge Excavation

The volume of excavation, designated on the Plans or in the Special Provisions as “Bridge Excavation” will be measured as described below and will be kept separate for pay purposes from the excavation for all structures.

The volume of bridge excavation to be paid shall be the vertical 450 mm outside of and parallel to the neat lines of the footing. The vertical planes shall constitute the vertical faces of the volume for pay quantities regardless of excavation inside or outside of these planes.

103.3.3 Foundation Fill

The volume of foundation fill to be paid for will be the number of cubic metres measured in final position of the special granular material actually provided and placed below the foundation elevation of structures as specified, completed in place and accepted.

103.3.4 Shoring, Cribbing, and Related Work

Shoring, cribbing and related work whenever included as a pay item in Bill of Quantities will be paid for at the lump sum bid price. This work shall include furnishing, constructing, maintaining, and removing any and all shoring, cribbing, cofferdams, caissons, bracing, sheeting, water control, and other operations necessary for the acceptable completion of excavation included in the work of this Section, to a depth of 1.5 m below the lowest elevation shown on the Plans for each separable foundation structure.

103.3.5 Basis of Payment

The accepted quantities, measured as prescribed in Section 103.3, shall be paid for at the contract unit price for each of the particular pay items listed below that is included in the Bill of Quantities. The payment shall constitute full compensation for the removal and disposal of excavated materials including all labor, equipment, tools and incidentals necessary to complete the work prescribed in this Item, except as follows:

(1) Any excavation for footings ordered at a depth more than 1.5 m below the lowest elevation shown on the original Contract Plans will be paid for as provided in Part K, Measurement and Payment, unless a pay item for excavation ordered below Plan elevation appears in the Bill of Quantities.

(2) Concrete will be measured and paid for as provided under Item 405, Structural Concrete.

(3) Any roadway or borrow excavation required in excess of the quantity excavated for structures will be measured and paid for as provided under Item 102.

(4) Shoring, cribbing, and related work required for excavation ordered more than 1.5 m below Plan elevation will be paid for in accordance with Part K.

Payment will be made under:

Pay Item Number	Description	Unit of Measurement
103 (1)	Structure Excavation	Cubic Meter
103 (2)	Bridge Excavation	Cubic Meter
103 (3)	Foundation Fill	Cubic Meter
103 (4)	Excavation ordered below Plan elevation	Cubic Meter
103 (5)	Shoring, cribbing, and related work	Lump sum
103 (6)	Pipe culverts and drain excavation	Cubic Meter

GRAVEL FILL

200.1 Description

This item shall consist of furnishing, placing and compacting an aggregate subbase course on a prepared subgrade in accordance with this Specification and the lines, grades and cross-sections shown on the Plans, or as directed by the Engineer.

200.2 Material Requirements

Aggregate for subbase shall consist of hard, durable particles or fragments of crushed stone, crushed slag, or crushed or natural gravel and filler of natural or crushed sand or other finely divided mineral matter. The composite material shall be free from vegetable matter and lumps or balls of clay, and shall be of such nature that it can be compacted readily to form a firm, stable subbase.

The subbase material shall conform to Table 200.1, Grading Requirements

Table 200.1 – Grading Requirements

Sieve Designation		Mass Percent Passing
Standard, mm	Alternate US Standard	
50	2"	100
25	1"	55 – 85
9.5	3/8"	40 – 75
0.075	No. 200	0 - 12

The fraction passing the 0.075 mm (No. 200) sieve shall not be greater than 0.66 (two thirds) of the fraction passing the 0.425 mm (No. 40) sieve.

The fraction passing the 0.425 mm (No. 40) sieve shall have a liquid limit not greater than 35 and plasticity index not greater than 12 as determined by AASHTO T 89 and T 90, respectively.

The coarse portion, retained on a 2.00 mm (No. 10) sieve, shall have a mass percent of wear not exceeding 50 by the Los Angeles Abrasion Tests as determined by AASHTO T 96.

The material shall have a soaked CBR value of not less than 30% as determined by AASHTO T 193. The CBR value shall be obtained at the maximum dry density and determined by AASHTO T 180, Method D.

200.3 Construction Requirements

200.3.1 Preparation of Existing Surface

The existing surface shall be graded and finished as provided under Item 105, Subgrade Preparation, before placing the subbase material.

200.3.2 Placing

The aggregate subbase material shall be placed at a uniform mixture on a prepared subgrade in a quantity which will provide the required compacted thickness. When more than one layer is required, each layer shall be shaped and compacted before the succeeding layer is placed.

The placing of material shall begin at the point designated by the Engineer. Placing shall be from vehicles especially equipped to distribute the material in a continuous uniform layer or windrow. The layer or windrow shall be of such size that when spread and compacted, the finished layer shall be in reasonably close conformity to the nominal thickness shown on the Plans.

0200.3.3 Spreading and Compacting

When uniformly mixed, the mixture shall be spread to the plan thickness, for compaction.Where the required thickness is 150 mm or less, the material may be spread and compacted in one layer. Where the required thickness is more than 150 mm, the aggregate subbase shall be spread and compacted in two or more layers of approximately equal thickness, and the maximum compacted thickness of any layer shall not exceed 150 mm. All subsequent layers shall be spread and compacted in a similar manner.

200.3.4 Trial Sections

Before subbase construction is started, the Contractor shall spread and compact trial sections as directed by the Engineer. The purpose of the trial sections is to check the suitability of the materials, the efficiency of the equipment and the construction method which is proposed to be used by the Contractor. Therefore, the Contractor must use the same material, equipment and procedures that he proposes to use for the main work. One trial section of about 500 m2 shall be made for every type of material and/or construction equipment/procedure proposed for use.

200.3.5 Tolerances

Aggregate subbase shall be spread with equipment that will provide a uniform layer which when compacted will conform to the designed level and transverse slopes as shown on the Plans. The allowable tolerances shall be as specified hereunder:

Permitted variation from design THICKNESS OF LAYER	± 20 mm
Permitted variation from design LEVEL OF SURFACE	+10 mm -20 mm
Permitted SURFACE IRREGULARITY Measured by 3-m straight-edge	20 mm
Permitted variation from design CROSSFALL OR CAMBER	±0.3%
Permitted variation from design LONGITUDINAL GRADE over 25 m in length	±0.1%

CONCRETE WORKS

405.1 Description

405.1.1 Scope

This Item shall consist of furnishing, placing and finishing concrete in all structures except pavements in accordance with this Specification and conforming to the lines, grades, and dimensions shown on the Plans. Concrete shall consist of a mixture of Portland Cement, fine aggregate, coarse aggregate, admixture when specified, and water mixed in the proportions specified or approved by the Engineer.

405.1.2 Classes and Uses of Concrete

Five classes of concrete are provided for in this Item, namely: A, B, C, P and Seal. Each class shall be used in that part of the structure as called for on the Plans.

The classes of concrete will generally be used as follows:

Class A – All superstructures and heavily reinforced substructures. The important parts of the structure included are slabs, beams, girders, columns, arch ribs, box culverts, reinforced abutments, retaining walls, and reinforced footings.

Class B – Footings, pedestals, massive pier shafts, pipe bedding, and gravity walls, unreinforced or with only a small amount of reinforcement.

Class C – Thin reinforced sections, railings, precast R.C. piles and cribbing and for filler in steel grid floors.

Class P – Prestressed concrete structures and members.

Seal – Concrete deposited in water.

405.2 Material Requirements

405.2.1 Portland Cement

It shall conform to all the requirements of Subsection 311.2.1.

405.2.2 Fine Aggregate

It shall conform to all the requirements of Subsection 311.2.2.

405.2.3 Coarse Aggregate

It shall conform all the requirements of Subsection 311.2.3 except that gradation shall conform to Table 405.1.

Table 405.1 – Grading Requirements for Coarse Aggregate

Sieve Designation		Mass Percent Passing				
Standard Mm	Alternate US Standard	Class A	Class B	Class C	Class P	Class Seal
63	2-1/2"					
50	2"	100	100			
37.5	1-1/2"	95 – 100	-			100
25	1"	-	35 – 70		100	95 – 100
19.0	¾"	35 – 70	-	100	-	-
12.5	½"	-	10 – 30	90 – 100	-	25 – 60
9.5	3/8"	10 – 30	-	40 – 70	20 – 55	-
4.75	No.4	0 – 5	0 - 5	0 – 15*	0 – 10*	0 – 10*

* The measured cement content shall be within plus (+) or minus (-) 2 mass percent of the design cement content.

405.2.4 Water

It shall conform to the requirements of Subsection 311.2.4.

405.2.5 Reinforcing Steel

It shall conform to the requirements of Item 710, Reinforcing Steel and Wire Rope.

405.2.6 Admixtures

Admixtures shall conform to the requirements of Subsection 311.2.7

405.2.7 Curing Materials

Curing materials shall conform to the requirements of Subsection 311.2.8.

405.2.8 Expansion Joint Materials

Expansion joint materials shall be:

1. Preformed Sponge Rubber and Cork, conforming to AASHTO M 153.

2. Hot-Poured Elastic Type, conforming to AASHTO M 173.

3. Preformed Fillers, conforming to AASHTO M 213.

405.2.9 Elastomeric Compression Joint Seals

These shall conform to AASHTO M 220.

405.2.10 Elastomeric Bearing Pads

These shall conform to AASHTO M 251 or Item 412 – Elastomeric Bearing Pads.

405.2.11 Storage of Cement and Aggregates

Storage of cement and aggregates shall conform to all the requirements of Subsection 311.2.10.

405.3 Sampling and Testing of Structural Concrete

As work progresses, at least one (1) sample consisting of three (3) concrete cylinder test specimens, 150 x 300 mm, shall be taken from each seventy five (75) cubic meters of each class of concrete or fraction thereof placed each day.Compliance with the requirements of this Section shall be determined in accordance with the following standard methods of AASHTO:

Sampling of fresh concrete	T 141
Weight per cubic metre and air content (gravi-metric) of concrete	T 121
Sieve analysis of fine and coarse aggregates	T 27
Slump of Portland Cement Concrete	T 119
Specific gravity and absorption of fine aggregate	T 84

Tests for strength shall be made in accordance with the following:

Making and curing concrete compressive and flexural tests specimens in the field	T 23
Compressive strength of molded concrete Cylinders	T 22

405.4 Production Requirements

405.4.1 Proportioning and Strength of Structural Concrete

The concrete materials shall be proportioned in accordance with the requirements for each class of concrete as specified in Table 405.2, using the absolute volume method as outlined in the American Concrete Institute (ACI) Standard 211.1. "Recommended Practice for Selecting Proportions for Normal and Heavyweight Concrete". Other methods of proportioning may be employed in the mix design with prior approval of the Engineer. The mix shall either be designed or approved by the Engineer. A change in the source of materials during the progress of work may necessitate a new mix design.

The strength requirements for each class of concrete shall be as specified in Table 405.2.

Table 405.2 - Composition and Strength of Concrete for Use in Structures

Class of Concrete	Minimum Cement Content Per m^3 40kg/ (bag**)	Maximum Water/ Cement Ratio kg/kg	Consistency Range in Slump mm	Designated Size of Coarse Aggregate Square Opening Std. mm	Minimum Compressive Strength of 150x300 mm Concrete Cylinder Specimen at 28 days, MN/m^2
A	364 (9.1 bags)	0.53	50 – 100	37.5 – 4.75 (1-1/2" – No. 4)	20.7
B	320 (8 bags)	0.58	50 – 100	50 – 4.75 (2" – No. 4)	16.5
C	380 (9.5 bags)	0.55	50 – 100	12.5 – 4.75 (1/2" – No. 4)	20.7
P	440 (11 bags)	0.49	100 max.	19.0 – 4.75 (3/4" – No. 4)	37.7
Seal	380 (9.5 bags)	0.58	100 – 200	25 – 4.75 (1" – No. 4)	20.7

* The measured cement content shall be within plus or minus 2 mass percent of the design cement content.
** Based on 40 kg/bag

405.4.2 Consistency

Concrete shall have a consistency such that it will be workable in the required position. It shall be of such a consistency that it will flow around reinforcing steel but individual particles of the coarse aggregate when isolated shall show a coating of mortar containing its proportionate amount of sand. The consistency of concrete shall be gauged by the ability of the equipment to properly place it and not by the difficulty in mixing and transporting. The quantity of mixing water shall be determined by the Engineer and shall not be varied without his consent. Concrete as dry as it is practical to place with the equipment specified shall be used.

405.4.3 Batching

Measuring and batching of materials shall be done at a batching plant.

1. Portland Cement

   Either sacked or bulk cement may be used. No fraction of a sack of cement shall be used in a batch of concrete unless the cement is weighed. All bulk cement shall be weighed on an approved weighing device. The bulk cement weighing hopper shall be properly sealed and vented to preclude dusting operation. The discharge chute shall not be suspended from the weighing hopper and shall be so arranged that cement will neither be lodged in it nor leak from it.

   Accuracy of batching shall be within plus (+) or minus (-) 1 mass percent.

2. Water

   Water may be measured either by volume or by weight. The accuracy of measuring the water shall be within a range of error of not more than 1 percent.

3. Aggregates

   Stockpiling of aggregates shall be in accordance with Subsection 311.2.10. All aggregates whether produced or handled by hydraulic methods or washed, shall be stockpiled or binned for draining for at least 12 hours prior to batching. Rail shipment requiring more than 12 hours will be accepted as adequate binning only if the car bodies permit free drainage. If the aggregates contain high or non-uniform moisture content, storage or stockpile period in excess of 12 hours may be required by the Engineer.Batching shall be conducted as to result in a two (2) mass percent maximum tolerance for the required materials.

4. Bins and Scales

   The batching plant shall include separate bins for bulk cement, fine aggregate and for each size of coarse aggregate, a weighing hopper, and scales capable of determining accurately the mass of each component of the batch.

   Scales shall be accurate to one-half (0.5) percent throughout the range used.

5. Batching

   When batches are hauled to the mixer, bulk cement shall be transported either in waterproof compartments or between the fine and coarse aggregate. When cement is placed in contact with moist aggregates, batches will be rejected unless mixed within 1-1/2 hours of such contact. Sacked cement may be transported on top of the aggregates.

   Batches shall be delivered to the mixer separate and intact. Each batch shall be dumped cleanly into the mixer without loss, and, when more than one batch is carried on the truck, without spilling of material from one batch compartment into another

6. Admixtures

   The Contractor shall follow an approved procedure for adding the specified amount of admixture to each batch and will be responsible for its uniform operation during the progress of the work. He shall provide separate scales for the admixtures which are to be proportioned by weight, and accurate measures for those to be proportioned by volume. Admixtures shall be measured into the mixer with an accuracy of plus or minus three (3) percent.

   The use of Calcium Chloride as an admixture will not be permitted.

405.4.4 Mixing and Delivery

Concrete may be mixed at the site of construction, at a central point or by a combination of central point and truck mixing or by a combination of central point mixing and truck agitating. Mixing and delivery of concrete shall be in accordance with the appropriate requirements of AASHTO M 157 except as modified in the following paragraphs of this section, for truck mixing or a combination of central point and truck mixing or truck agitating. Delivery of concrete shall be regulated so that placing is at a continuous rate unless delayed by the placing operations. The intervals between delivery of batches shall not be so great as to allow the concrete inplace to harden partially, and in no case shall such an interval exceed 30 minutes.

In exceptional cases and when volumetric measurements are authorized, for small project requiring less than 75 cu.m. per day of pouring, the weight proportions shall be converted to equivalent volumetric proportions. In such cases, suitable allowance shall be made for variations in the moisture condition of the aggregates, including the bulking effect in the fine aggregate. Batching and mixing shall be in accordance with ASTM C 685, Section 6 through 9.

Concrete mixing, by chute is allowed provided that a weighing scales for determining the batch weight will be used.

For batch mixing at the site of construction or at a central point, a batch mixer of an approved type shall be used. Mixer having a rated capacity of less than a one-bag batch shall not be used. The volume of concrete mixed per batch shall not exceed the mixer's nominal capacity as shown on the manufacturer's standard rating plate on the mixer except that an overload up to 10 percent above the mixer's nominal capacity may be permitted, provided concrete test data for strength, segregation, and uniform consistency are satisfactory and provided no spillage of concrete takes place. The batch shall be so charge into the drum that a portion of the water shall enter in advance of the cement and aggregates. The flow of water shall be uniform and all water shall be in the drum by the end of the first 15 seconds of the mixing period. Mixing time shall be measured from the time all materials, except water, are in the drum. Mixing time shall not be less than 60 seconds for mixers having a capacity of 1.5 m 3 or less. For mixers having a capacity greater than 1.5m3 , the mixing time shall not be less than 90 seconds. If timing starts, the instant the skip reaches its maximum raised position, 4 seconds shall be added to the specified mixing time. Mixing time ends when the discharge chute opens.

The mixer shall be operated at the drum speed as shown on the manufacturer's name plate on the mixer. Any concrete mixed less than the specified time shall be discarded and disposed off by the Contractor at his own expenses.

The timing device on stationary mixers shall be equipped with a bell or other suitable warning device adjusted to give a clearly audible signal each time the lock is released. In case of failure of the timing device, the Contractor will be permitted to continue operations while it is being repaired, provided he furnishes an approved timepiece equipped with minute and second hands. If the timing device is not placed in good working order within 24 hours, further use of the mixer will be prohibited until repairs are made.

Retempering concrete will not be permitted. Admixtures for increasing the workability, for retarding the set, or for accelerating the set or improving the pumping characteristics of the concrete will be permitted only when specifically provided for in the Contract, or authorized in writing by the Engineer.

1. Mixing Concrete:

   General Concrete shall be thoroughly mixed in a mixer of an approved size and type that will insure a uniform distribution of the materials throughout the mass.

   All concrete shall be mixed in mechanically operated mixers. Mixing plant and equipment for transporting and placing concrete shall be arranged with an ample auxiliary installation to provide a minimum supply of concrete in case of breakdown of machinery or in case the normal supply of concrete is disrupted. The auxiliary supply of concrete shall be sufficient to complete the casting of a section up to a construction joint that will meet the approval of the Engineer.

   Equipment having components made of aluminum or magnesium alloys, which would have contact with plastic concrete during mixing, transporting or pumping of Portland Cement concrete, shall not be used.

   Concrete mixers shall be equipped with adequate water storage and a device of accurately measuring and automatically controlling the amount of water used.

Materials shall be measured by weighing. The apparatus provided for weighing the aggregates and cement shall be suitably designed and constructed for this purpose. The accuracy of all weighing devices except that for water shall be such that successive quantities can be measured to within one (1) percent of the desired amounts. The water measuring device shall be accurate to plus or minus 0.5 mass percent. All measuring devices shall be subject to the approval of the Engineer. Scales and measuring devices shall be tested at the expense of the Contractor as frequently as the Engineer may deem necessary to insure their accuracy.

Weighing equipment shall be insulated against vibration or movement of other operating equipment in the plant. When the entire plant is running, the scale reading at cut-off shall not vary from the weight designated by the Engineer more than one (1) mass percent for cement, one and a half (1-1/2) mass percent for any size of aggregate, or one (1) mass percent for the total aggregate in any batch.

2. Mixing Concrete at Site

Concrete mixers may be of the revolving drum or the revolving blade type and the mixing drum or blades shall be operated uniformly at the mixing speed recommended by the manufacturer. The pick-up and throw-over blades of mixers shall be restored or replaced when any part or section is worn 20 mm or more below the original height of the manufacturer's design. Mixers and agitators which have an accumulation of hard concrete or mortar shall not be used.

When bulk cement is used and volume of the batch is 0.5 m 3 or more, the scale and weigh hopper for Portland Cement shall be separate and distinct from the aggregate hopper or hoppers. The discharge mechanism of the bulk cement weigh hopper shall be interlocked against opening before the full amount of cement is in the hopper. The discharging mechanism shall also be interlocked against opening when the amount of cement in the hopper is underweight by more than one (1) mass percent or overweight by more than three (3) mass percent of the amount specified.

When the aggregate contains more water than the quantity necessary to produce a saturated surface dry condition, representative samples shall be taken and the moisture content determined for each kind of aggregate.

The batch shall be so charged into the mixer that some water will enter in advance of cement and aggregate. All water shall be in the drum by the end of the first quarter of the specified mixing time.

Cement shall be batched and charged into the mixer so that it will not result in loss of cement due to the effect of wind, or in accumulation of cement on surface of conveyors or hoppers, or in other conditions which reduce or vary the required quantity of cement in the concrete mixture.

The entire content of a batch mixer shall be removed from the drum before materials for a succeeding batch are placed therein. The materials composing a batch except water shall be deposited simultaneously into the mixer.

All concrete shall be mixed for a period of not less than 1-1/2 minutes after all materials, including water, are in the mixer. During the period of mixing, the mixer shall operate at the speed for which it has been designed.

Mixers shall be operated with an automatic timing device that can be locked by the Engineer. The time device and discharge mechanics shall be so interlocked that during normal operation no part of the batch will be charged until the specified mixing time has elapsed.

The first batch of concrete materials placed in the mixer shall contain a sufficient excess of cement, sand, and water to coat inside of the drum without reducing the required mortar content of the mix. When mixing is to cease for a period of one hour or more, the mixer shall be thoroughly cleaned.

3. Mixing Concrete at Central Plant

Mixing at central plant shall conform to the requirements for mixing at the site.

4. Mixing Concrete in Truck

Truck mixers, unless otherwise authorized by the Engineer, shall be of the revolving drum type, water-tight, and so constructed that the concrete can be mixed to insure a uniform distribution of materials throughout the mass. All solid materials for the concrete shall be accurately measured and charged into the drum at the proportioning plant. Except as subsequently provided, the truck mixer shall be equipped with a device by which the quantity of water added can be readily verified. The mixing water may be added directly to the batch, in which case a tank is not required. Truck mixers may be required to be provided with a means of which the mixing time can be readily verified by the Engineer.

The maximum size of batch in truck mixers shall not exceed the minimum rated capacity of the mixer as stated by the manufacturer and stamped in metal on the mixer. Truck mixing, shall, unless otherwise directed be continued for not less than 100 revolutions after all ingredients, including water, are in the drum. The mixing speed shall not be less than 4 rpm, nor more than 6 rpm.

Mixing shall begin within 30 minutes after the cement has been added either to the water or aggregate, but when cement is charged into a mixer drum containing water or surface wet aggregate and when the temperature is above 32oC, this limit shall be reduced to 15 minutes. The limitation in time between the introduction of the cement to the aggregate and the beginning of the mixing may be waived when, in the judgement of the Engineer, the aggregate is sufficiently free from moisture, so that there will be no harmful effects on the cement.

When a truck mixer is used for transportation, the mixing time specified in Subsection 405.4.4 (3) at a stationary mixer may be reduced to 30 seconds and the mixing completed in a truck mixer. The mixing time in the truck mixer shall be as specified for truck mixing.

5. Transporting Mixed Concrete

Mixed concrete may only be transported to the delivery point in truck agitators or truck mixers operating at the speed designated by the manufacturers of the equipment as agitating speed, or in non-agitating hauling equipment, provided the consistency and workability of the mixed concrete upon discharge at the delivery point is suitable point for adequate placement and consolidation in place.

Truck agitators shall be loaded not to exceed the manufacturer's guaranteed capacity. They shall maintain the mixed concrete in a thoroughly mixed and uniform mass during hauling.

No additional mixing water shall be incorporated into the concrete during hauling or after arrival at the delivery point.

The rate of discharge of mixed concrete from truck mixers or agitators shall be controlled by the speed of rotation of the drum in the discharge direction with the discharge gate fully open.

When a truck mixer or agitator is used for transporting concrete to the delivery point, discharge shall be completed within one hour, or before 250 revolutions of the drum or blades, whichever comes first, after the introduction of the cement to the aggregates. Under conditions contributing to quick stiffening of the concrete or when the temperature of the concrete is 30oC, or above, a time less than one hour will be required.

6. Delivery of Mixed Concrete

The Contractor shall have sufficient plant capacity and transportation apparatus to insure continuous delivery at the rate required. The rate of delivery of concrete during concreting operations shall be such as to provide for the proper handling, placing and finishing of the concrete. The rate shall be such that the interval between batches shall not exceed 20 minutes. The methods of delivering and handling the concrete shall be such as will facilitate placing of the minimum handling.

405.5 Method of Measurement

The quantity of structural concrete to be paid for will be the final quantity placed and accepted in the completed structure. No

deduction will be made for the volume occupied by pipe less than 100 mm in diameter or by reinforcing steel, anchors, conduits, weep holes or expansion joint materials.

REINFORCING STEEL & WIRE ROPE

404.1 Description

This Item shall consist of furnishing, bending, fabricating and placing of steel reinforcement of the type, size, shape and grade required in accordance with this Specification and in conformity with the requirements shown on the Plans or as directed by the Engineer.

404.2 Material Requirements

Reinforcing steel shall meet the requirements of Item 710, Reinforcing Steel and Wire Rope.

404.3 Construction Requirements

404.3.1 Order Lists

Before materials are ordered, all order lists and bending diagrams shall be furnished by the Contractor, for approval of the Engineer. The approval of order lists and bending diagrams by the Engineer shall in no way relieve the Contractor of responsibility for the correctness of such lists and diagrams. Any expense incident to the revisions of materials furnished in accordance with such lists and diagrams to make them comply with the Plans shall be borne by the Contractor.

404.3.3 Bending

All reinforcing bars requiring bending shall be cold-bent to the shapes shown on the Plans or as required by the Engineer. Bars shall be bent around a circular pin having the following diameters (D) in relation to the nominal diameter of the bar (d):

404.3.4 Placing and Fastening

All steel reinforcement shall be accurately placed in the position shown on the Plans or as required by the Engineer and firmly held there during the placing and setting of the concrete. Bars shall be tied at all intersections except where spacing is less than 300 mm in each directions, in which case, alternate intersections shall be tied. Ties shall be fastened on the inside.

404.3.5 Splicing

All reinforcement shall be furnished in the full lengths indicated on the Plans. Splicing of bars, except where shown on the Plans, will not be permitted without the written approval of the Engineer. Splices shall be staggered as far as possible and with a minimum separation of not less than 40 bar diameters. Not more than one-third of the bars may be spliced in the same cross-section, except where shown on the Plans.

Unless otherwise shown on the Plans, bars shall be lapped a minimum distance of:

710.1 Reinforcing Steel

Reinforcing steel shall conform to the requirements of the following Specifications:

Deformed Billet-Steel Bars for Concrete Reinforcement	AASHTO M 31 (ASTM A 615/PNS 49)
Deformed Steel Wire for Concrete Reinforcement	AASHTO M 225 (ASTM A 496)
Welded Steel Wire Fabric for Concrete Reinforcement	AASHTO M 55 (ASTM A 185)
Cold-Drawn Steel Wire for Concrete Reinforcement	AASHTO M 32 (ASTM A 82)
Fabricated Steel Bar or Rod Mats for Concrete Reinforcement	AASHTO M 54 (ASTM A 184)
Welded Deformed Steel Wire Fabric of Concrete Reinforcement	AASHTO M 221 (ASTM A 497)
Plastic Coated Dowel Bars	AASHTO M 254 Type A
Low Alloy Steel Deformed Bars for Concrete Reinforcement	ASTM A 206

Bar reinforcement for concrete structures, except No. 2 bars shall be deformed in accordance with AASHTO M 42, M 31 and M 53 for Nos. 3 to 11.

Dowel and tie bars shall conform to the requirements of AASHTO M 31 (ASTM A 615/PNS 49) or AASHTO M 42 except that rail steel shall not be used for tie bars that are to be bent and restraightened during construction. Tie bars shall be deformed bars. Dowel bars shall be plain round bars. They shall be free from burring or other deformation restricting slippage in the concrete. Before delivery to the site of the work, a minimum of one half (1/2) the length of each dowel bar shall be painted with one coat of approved lead or tar paint.

The sleeves for dowel bars shall be metal of an approved design to cover 50 mm, plus or minus 6.3 mm of the dowel, with a closed end, and with a suitable stop to hold the end of the sleeve at least 25 mm from the end of the dowel bar. Sleeves shall be of such design that they do not collapse during construction.

Plastic coated dowel bar conforming to AASHTO M 254 may be used.

710.2 Wire Rope or Wire Cable

The wire rope or wire cable shall conform to the requirements of AASHTO M 30 for the specified diameter and strength class.

710.3 Prestressing Reinforcing Steel

Prestressing reinforcing steel shall conform to the requirements of the following Specifications:

High-tensile wire AASHTO M 204 (ASTM A 421)

High-tensile wire strand or rope AASHTO M 203 (ASTM A 416)

High-tensile alloy bars as follows:

High-tensile-strength alloy bars shall be cold stretched to a minimum of 895.7 MPa. The resultant physical properties shall be as follows:

Minimum ultimate tensile strength	1000 MPa followed by stress relieving
Minimum yield strength, measured by the 0.7 percent extension under load method shall not be less than	895.7 MPa
Minimum modulus of elasticity	25,000,000
Minimum elongation in 20 bar diameters after rupture	4 percent
Diameters tolerance	+0.762 mm – 0.254 mm

If shown on the Plans, type 270 k strand shall be used, conforming to AASHTO M 203.

FORMS & FALSEWORKS

Item 414 -Forms and Falseworks

414.1 Description

This Item shall consist of designing, constructing and removing forms and falsework to temporarily support concrete, girders and other structural elements until the structure is completed to the point it can support itself.

414.2Material Requirements

414.2.1Formwork

The materials used for smooth form finish shall be plywood, tempered concrete-form-grade hardboard, metal, plastic, paper or other acceptable materials capable of producing the desired finish for form-facing materials. Formfacing materials shall produce a smooth, uniform texture on the concrete. Formfacing materials with raised grain, torn surfaces, worn edges, patches, dents, or other defects that will impair the texture of concrete surfaces shall not be permitted. No form-facing material shall be specified for rough form finish.

414.2.1.1 Formwork Accessories

Formwork accessories that are partially or wholly embedded in concrete, including ties and hangers shall be commercially manufactured. The use of non fabricated wire form ties shall not be permitted. Where indicated in the Contract, use form ties with integral water barrier plates in walls.

414.2.1.2 Formwork Release Agents

Commercially manufactured formwork release agents shall be used to prevent formwork absorption of moisture, prevent bond with concrete, and not stain the concrete surfaces.

414.2.2 Falsework

The materials to be used in the falsework construction shall be of the quantity and quality necessary to withstand the stresses imposed; it may be timber or steel or a combination of both. The workmanship shall be of such quality that the falsework will support the loads imposed on it without excessive settlement or take-up beyond as shown on the falsework drawings.

414.3. Construction Requirements

414.3.1Design

Falsework and Formworks design and drawings shall be in accordance, with Item 407, Concrete Structures, Subsection 407.3.9 and 407.3.12, respectively.

414.3.1.1 Formwork and Falsework Drawings

When complete details for forms and falseworks are not shown, prepare and submit drawings to the Engineer showing the following:

1. Details for constructing safe and adequate forms and falsework that provide the necessary rigidity, support the loads imposed, and produce in the finished structure the required lines and grades. See subsection 414.3.1.2 for design loads. See Subsection 414.3.1.3 for design stresses, loadings and deflections. See Subsection 414.3.2 for manufactured assemblies.

2. The maximum applied structural load on the foundation material. Include a drainage plan or description of how foundations will be protected from saturation, erosion, and/or scour see Subsection 414.3.3.1.

3. The description of all proposed material. Describe the material that is not describable by standard nomenclature (such as AASHTO or ASTM specified) based on manufacturer's test and recommended working loads. Provide evaluation data for falsework material showing that the physical properties and conditions of the material can support the loads assumed in the design.

4. The design calculations and material specifications showing that the proposed system will support the imposed concrete pressures and other loads. Provide an outline of the proposed concrete placement operation listing the equipment, labor, and procedures to be used for the duration of each operation. A superstructure placing diagram showing the concrete placing sequence and construction joint locations is included.

5. Design calculations for proposed bridge falsework. A registered professional engineer proficient in structural design shall design, sign, and seal the drawings. The falsework design calculations shall show the stresses and deflections in load supporting members.

6. Anticipated total settlements of falsework and forms shall be shown. Include falsework footing settlement and joint take-up. Design for anticipated settlements not to exceed 20 millimeters. Design and detail on falsework supporting deck slabs and overhangs on girder bridges so that there will be no differential settlement between the girders and the deck forms during placement of deck concrete. Design and construct the falsework to elevations that include anticipated settlement during concrete placement and required camber to compensate for member deflections during construction.

7. Support system for form panels supporting concrete deck slabs and overhangs on girder bridges.

8. Details for strengthening and protecting falsework over or adjacent to roadways and railroads during each phase of erection and removal. See Subbsection 414.3.3.2.

9. Intended steel erection procedures with calculations in sufficient detail to substantiate that the girder geometry will be correct. See Subsection 414.3.3.3.

Details of proposed anchorage and ties for void forms shall be submitted. See Subsection 414.3.4 for void form requirements.

Separate Falsework drawings for each structure shall be submitted to the Engineer for approval, except for identical structures with identical falsework design and details.

414.3.1.2 Design Loads for Forms and Falsework

414.3.1.2.1 Vertical Design Loads

Dead loads include the mass of concrete, reinforcing steel, forms and falsework. Consider the entire superstructure, or any concrete mass being supported by falsework to be a fluid dead load with no ability to support itself. If the concrete is to be prestressed, design the falsework to support any increase or readjusted loads caused by the prestressing forces.

The assumed density of concrete, reinforcing steel, and forms shall be not less than 2600 kilograms per cubic meter for normal concrete and not less than 2100 kilograms per cubic meter for lightweight concrete.

Consider live loads to be actual mass of equipment to be supported by falsework applied as concentrated loads at the point of contact plus a uniform load of not less than 1000 pascals applied over the area supported, plus 1100 newtons per meter applied at the outside edge of the deck falsework overhangs.

The total vertical design load for falsework shall be the sum of vertical dead and live loads. The total vertical design load used shall be not less than 4800 pascals.

414.3.1.2.2 Horizontal Design Loads

Use an assumed horizontal design load on falsework towers, bents frames and other falsework structures to verify lateral stability. The assumed horizontal load is the sum of the actual horizontal loads due to equipment construction sequence, or other causes and an allowance for wind. However, in no case is the assumed horizontal load shall be less than 2 percent of the total supported dead load at the location under consideration.

The minimum wind allowance for each heavy-duty steel shoring having a vertical load carrying capacity exceeding 130 kilonewtons per leg is the sum of the products of the wind impact area, shape factor and the applicable wind pressure value for each height zone. The wind impact area is the total projected area of all elements in the tower face normal to the applied wind. Assume the shape factor for heavy duty shoring to be 2.2. Determine wind pressure value from Table 1.

Table 1
Design Wind Pressure-Heavy Duty Steel Shoring

Height Zone Above Ground Meter	Wind Pressure Value-Pa	
	Adjacent to Traffic	At Other Locations
0 9-15 15-30 Over 30	960 1200 1450 1675	720 960 1200 1450

The minimum wind allowance on all other types of falsework, including falsework supported on heavy-duty shoring, is the sum of the products of the wind impact area and the applicable wind pressure value for each height zone. The wind impact area is the gross projected area of the falsework and unrestrained portion of the permanent structure, excluding the areas between falsework posts or towers where diagonal bracing is not used. Used design wind pressures from Table 2.

Table 2
Design Wind Pressure-Other Types of Falsework

Height Zone Above Ground Meter	Wind Pressure Value-Pa	
	For Members Over and Bents Adjacent to Traffic Openings	At Other Locations
0 9-15 15-30 Over 30	320 Q 400 Q 480 Q 560 Q	240 Q 320 Q 400 Q 480 Q

Note: Q=0.3+0.2*W*, but not more than 3. *W* is the width of the falsework system in meters measured in the direction of the wind force being considered

414.3.1.2.3Lateral Fluid Pressure

For concrete with retarding admixture, fly ash or other pozzolan replacement for cement, design form, form ties and bracing for a lateral fluid pressure based on concrete with a density of 2400 kilograms per cubic meter. For concrete containing no pozzolans or admixtures, which affect the time to initial set, the lateral fluid pressure shall be determined based on concrete temperature and rate of placement according to ACI Standard 347R, Guide for Formwork for Concrete.

414.3.1.3Design Stresses, Loads and Deflections for Forms and Falsework

The allowable maximum design stresses and loads listed in this section are based on the use of undamaged high-quality material. If lesser quality material is used, reduce the allowable stresses and loads. The following maximum stresses, loads and deflections in the falsework design shall not be exceeded.

414.3.1.3.1 For Timber

Compression perpendicular to the grain = 3100 kilopascals

Compression parallel to the grain (1) $= \frac{3309}{(L/d)^2}$ megapascals

Note: (1) Not to exceed 11 megapascals

Where:

L = Unsupported length

d = Least dimension of a square or rectangular column or the width of a square of equivalent cross-sectional area for round columns

Flexural stress = 12.4 megapascals

Note: Reduced to 10 megapascals for members with a nominal depth of 200 millimeters or less

Horizontal shear = 1300 kilopascals

Axial tension = 8.3 megapascals

Deflection due to the mass of concrete may not exceed 1/500 of the span even if the deflection is compensated for by camber strips

Modulus of elasticity (E) for timber = 11.7 gigapascals

Maximum axial loading on timber piles = 400 kilonewtons

414.3.1.3.2For Steel

For identified grades of steel the design stresses (other than stresses due to flexural compression) specified in the Manual of Steel Construction as published by the AISC shall not be exceeded.

When the grade of steel cannot be positively identified, the design stresses other than stresses due to flexural compression shall not be exceeded, either specified in the AISC Manual or ASTM A 36M structural steel or the following:

Tension, axial and flexural = 150 megapascals

Compression, axial = 110 000 – 2.6$(L/r)^2$kilopascals

Note: L/r shall not exceed 120

Shear on the web gross section of rolled shapes = 100 megapascals

Web crippling for rolled shapes = 185 megapascals

For all grades of steel, do not exceed the following design stresses and deflection:

Compression flexural$^{(1)}$ = $\frac{82\ 750}{(Ld/bt)}$ megapascals

Note: (1) Not to exceed 150 megapascals for unidentified steel or steel conforming to ASTM A 36. Not to exceed 0.6 Fy for other identified steel.

Where:

L = Unsupported length

d = Least dimension of a square or rectangular column or the width of square of equivalent cross-sectional area for round columns or the depth of beams

b = Width of the compression flange

t = Thickness of the compression flange

r = Raduis of gyration of the member

F_y = Specified minimum yield stress for the grade of steel used

Deflection due to the mass of concrete may not exceed 1/500 of the span even if the deflection is compensated for by camber strips.

Modulus of elasticity (E) for steel = 210 gigapascals

414.3.1.3.3 Other Requirements

Limit falsework spans supporting T-beam girder bridges to 4.3 meters plus 8.5 times the overall depth of T-beam girder.

414.3.2 Manufactured Assemblies

For jacks, brackets, columns, joist and other manufactured devices, the ultimate load carrying capacity of the assembly shall not exceed the manufacturer's recommendations or 40 percent based on the manufacturer's tests or additional tests ordered. The maximum allowable dead load deflection of joists shall be 1/500 of their spans.

Catalog or equivalent data shall be submitted to the Engineer showing the manufacturer's recommendations or perform tests, as necessary to demonstrate the adequacy of any manufactured device proposed for use. No substitution is allowed on manufacturer's components unless the manufacturer's data encompasses such substitutions or field tests reaffirm the integrity of the system.

If a component of the falsework system consists of a steel frame tower exceeding 2 or more levels high, the differential leg loading within the steel tower unit shall not exceed 4 to 1. An exception may be approved if the manufacturer of the steel frame certifies, based on manufacturer's tests, that the proposed differential loadings are not detrimental to the safe load carrying capacity of the steel frame.

414.3.3 Falsework Construction

The falsework construction shall be in accordance whenever applicable, with Item 407 Concrete Structures Subsection 407.3.10 Falsework Construction.

414.3.3.1 Falsework Foundations

All ground elevations at proposed foundation location shall be verified before design.

Where spread footing type foundation are used, determine the bearing capacity of the soil. The maximum allowable bearing capacity for foundation material, other than rock, is 190 kilopascals.

The edge of footing shall not be located closer than 300 millimeters from the intersection of the bench and the top of the slope. Unless the excavation for footings is adequately supported by shoring, the edge of the footings shall not be closer than 1.2 meters of the depth of excavation, whichever is greater, from the edge of the excavation.

When falsework is supported by footings placed on paved, well-compacted slopes of berm fills, do not strut the falsework to columns unless the column is founded on rock or supported by piling.

The spread footings to support the footing design load at the assumed bearing capacity of the soil shall be designed without exceeding anticipated settlements. Steel reinforcement shall be provided in concrete footings.

When individual steel towers have a maximum leg loads exceeding 130 kilonewtons, uniform settlement under all legs or each tower under all loading conditions shall be provided.

Protect the foundation from adverse effects for the duration of its use.

414.3.3.2 Falsework Over or Adjacent to Roadways and Railroads

Falsework shall be designed and constructed with protection from vehicle impact. This includes falsework posts that support members crossing over a roadway or railroad and other falsework posts if they are located in the row of falsework posts nearest to the roadway or railroad and if the horizontal distance from the traffic side of the falsework to the edge of pavement or to a point 3 meters from the centerline of track is less than the total height of the falsework.

Additional features shall be provided to ensure that this falsework will remain stable if subjected to impact by vehicles. Use vertical design loads for these falsework posts, columns, and towers (but not footings) that are greater than or equal to either of the following:

1. 150 percent of the design load calculated according to Subsection 414.3.1.2 but not including any increased or readjusted loads caused by prestressing forces.

2. The increased or readjusted loads caused by prestressing forces.

Temporary traffic barriers shall be installed before erecting falsework towers or columns adjacent to an open public roadway. Barriers shall be located so that falsework footings or pile caps are at least 75 millimeters clear of concrete traffic barriers and all other

falsework members are at least 300 mm clear. Do not remove barriers until approved. Use falsework columns that are steel with a minimum section modulus about each axis of 156,000 cubic millimeters or sound timbers with a minimum section modulus about each axis of 4,100,000 cubic millimeters.

Mechanically connect the base of each column or tower frame supporting falsework over or immediately adjacent to an open public road to its supporting footing or provide other lateral restraint to withstand a force of not less than 9 kilonewtons applied to the base of the column in any direction. Mechanically connect such columns or frames to the falsework cap or stringer to resist a horizontal force of not less than 4.5 kilonewtons in any direction. Neglect the effects of frictional resistance.

Brace or tie exterior girders, upon which overhanging bridge deck falsework brackets are hung, to the adjacent interior girders as necessary to prevent rotation of exterior girders or overstressing the exterior girder web.

Mechanically connect all exterior falsework stringers and stringers adjacent to the end of discontinuous caps, the stringer or stringers over points of minimum vertical clearance and every fifth remaining stringer, to the falsework cap or framing. Provide mechanical connections capable of resisting load in any direction, including uplift on the stringer, if not less than 2.2 kilonewtons. Connections shall be installed before traffic is allowed to pass beneath the span.

16 millimeters diameter or larger bolts to connect timber members shall be used to brace falsework bents located adjacent to roadways or railroads.

Sheath falsework bents within 6 meters of the centerline of a railroad track solid in the area between 1 and 5 meters above the track on the side facing the track. Construct sheathing of plywood not less than 16 millimeters thick or lumber not less than 25 millimeters nominal thickness. Adequate bracing shall be provided on such bents so that the bent resists the required assumed horizontal load or 22 kilonewtons, whichever is greater, without the aid of sheathing.

Provide at least the minimum required vertical and horizontal clearances through falsework for roadways, railroads, pedestrians, and boats.

414.3.3.3 Falsework for Steel Structures

Falsework design loads shall consist of the mass of structural steel, the load of supported erection equipment, and all other supported by the falsework.

Falsework and forms for concrete supported on steel structures shall be designed so that loads are applied to girder webs within 150 millimeters of flange or stiffener. Distribute the loads in a manner that does not produce local distortion of the web. Do not use deck overhang forms that require holes to be drilled into the girder webs.

Strut and tie exterior girders supporting overhanging deck falsework brackets to adjacent interior girders to prevent distortion and overstressing of the exterior girder web.

Do not apply loads to existing, new or partially completed structures that exceed the load carrying capacity of any part of the structure according to the load factor design methods of the AASHTO Bridge Design Specifications using load group IB.

Build supporting falsework that will accommodate the proposed method of erection without overstressing the structural steel, as required and will produce the required final structural geometry, intended continuity and structural action.

414.3.4 Forms

The forms construction shall be in accordance whenever applicable, with Item 407, Concrete Structures Subsection 407.3.13, Formwork Construction.

Form panels to be used shall be in good condition free of defects on exposed surfaces. If form panel material other than plywood is used, it shall have flexural strength, modulus of elasticity and other physical properties equal to or greater than the physical properties for the type of plywood specified.

Furnish and place form panels for exposed surfaces in uniform widths of not less than 1 meter and in uniform lengths of not less than 2 meters except where the width of the member formed is less than 1 meter.

Arrange panels in symmetrical patterns conforming to the general lines of the structure. Place panels for vertical surfaces with the long dimension horizontal and with horizontal joints level and continuous. For walls with sloping footings which do not abut other walls, panels may be placed with the long dimension parallel to the footing.

Form panels shall be precisely aligned on each side of the panel joint by means of supports or fasteners common to both panels.

Use form ties and anchors that can be removed without damaging the concrete surface. Construct metal ties or anchorages within the forms to permit their removal to a depth of at least 25 millimeters from the face without damage to the concrete. Fill cavities with cement mortar and finish to a sound, smooth, uniform colored surface.

Support roadway slab forms of box girder type structures on wales or similar supports fastened, as nearly as possible, to the top of the web walls.

Form exposed curved surfaces to follow the shape of the curve, except on retaining walls that follow a horizontal curve. The wall stems may be a series of short chords if all of the following apply:

1. Chords within the panel are the same length.

2. Chords do not vary from a true curve by more than 15 millimeters at any point.

3. All panel points are on the true curve

When architectural treatment is required, make the angle points for chords in wall stems fall at vertical rustication joints.

Earth cuts as forms for vertical or sloping surfaces shall not be used unless otherwise required or permitted by the Contract.

4.3.4.1 Stay in Place Deck Forms

Use permanent or stay inplace forms only when permitted by the contract.

Fabricate permanent steel bridge deck forms and supports from steel conforming to ASTM A 653M coating designation 2600, any grade except grade 340 class 3.

Install forms according to accepted fabrication and erection drawings. Do not rest form sheets directly on the top of stringer or floor beam flanges. Securely fasten sheets to form supports. Place form supports in direct contact with the stringer flange or floor beam. Make all attachments with permissible welds, bolts or clips. Do not weld form supports to flanges of steels not considered weldable or to portions of flanges subject to tensile stresses.

Clean with wire brush and paint 2 coats of zinc dust zinc-oxide primer (FSS TT-P-641 type II no color added) any permanently exposed form metal where the galvanized coating has been damaged. Minor heat discoloration in areas of welds need not be touched up.

Locate transverse construction joints in slabs at the bottom of a flute. Field drill 6 millimeter diameter weep holes at not less than 300 millimeters on center along the line of the joint.

414.3.4.2 Void Forms

Store void forms in a dry location to prevent distortion. Secure the forms using anchors and ties which leave a minimum of metal or other supporting material exposed at the bottom of finished slab.

Make the outside surface of the forms waterproof. Cover the ends with waterproof mortar tight caps. Use premolded 6 millimeters thick rubber joint filler around the perimeter of the caps to permit expansion.

Provide a PVC vent near each void form. Construct vents so the vent tube shall not extend more than 13 millimeters below the bottom surface of the finished concrete after form removal. Protect void from the weather until concrete is placed.

414.3.4.3 Metal Forms

The specification for forms relative to design, mortar tightness, filleted corners, beveled projection, bracing, alignment, removal, reuse and oiling also apply to metal forms.

414.3.5 Removal of Forms and Falsework

The removal of forms and falsework shall be in accordance whenever applicable, with Item 407 Concrete Structures, Subsection 407.3.11 Removing Falsework and Subsection 407.3.14 Removal of Forms and Falsework.

Where necessary remove all forms except the following:

1. Interior soffit forms for roadway deck slabs of cast-in-place box girders.

2. Forms for the interior voids of precast members

3. Forms for abutments or piers when no permanent access is available into the cells or voids Install a reshoring system if falsework supporting the sides of girders stems with slopes steeper than 1:1 are removed before placing deck slab concrete. Design the reshoring system with lateral supports which resist all rotational forces acting on the stem, including those caused by the placement of deck slab concrete. Install the lateral supports immediately after each form panel is removed and before release of supports for the adjacent form panel.

414.3.6 Acceptance

Forms and falsework (including design, construction, and removal) shall be evaluated and approved by the Engineer.

When the falsework installation is complete and before concrete placement or removal begins, the falsework shall be inspected by the Engineer. The Engineer shall certify in writing that the installation conforms to the contract, the approved falsework drawings (including approved changes) and acceptable engineering practices.

414.4 Method of Measurement

When the Contract stipulates that payment will be made for forms and falsework on lump-sum basis, the Pay Item will include all materials and accessories needed in the work.

Whenever the Bill of Quantities does not contain an item for form and falsework, the work will not be paid directly but will be considered as a subsidiary obligation of the contractor under other Contract Items.

414.5 Basis of Payment

The accepted quantities measured as prescribe in Subsection 414.4, shall be paid for at the Contract lump-sum price for Forms and Falsework which price and payment shall be full compensation for designing, constructing and removing forms and falsework, all materials and accessories needed and for furnishing all labor equipment tools and incidentals necessary to complete the item.

Payment will be made under:

Pay Item Number	Description	Unit of Measurement
414	Forms and Falsework	Lump Sum

PROJECT BILLBOARD

2.2.3 For infrastructure projects, a tarpaulin signboard must be suitably framed for outdoor display at the project location, and shall be posted as soon as the award has been made. The design and format of the tarpaulin, as shown in Annex "A", shall have the following specification:

Tarpaulin, white. 8 ft x 8 ft	Tarpaulin, white, 4 ft x 8 ft
Resolution: 70 dpi	Resolution: 70 dpi
Font: Helvetica	Font: Helvetica
Font Size: Main Information -3"	Font Size: Main Information -3"
Sub Information -1"	Sub-Information –1"
Font Color: Black	Font Color: Black

CONSTRUCTION SAFETY & HEALTH PROGRAM

B.2 MEDICAL ROOM AND FIRST AID FACILITIES

1. The Contractor shall provide and maintain throughout the duration of the Contract a medical room together with all necessary supplies to be sited in the Contractor's main area. The medical room shall be waterproof, it could be a building or room designated and used exclusively for the purpose. It shall have a floor area of at least 15 square meters and a glazed window area or at least 2 square meters.

2. The Contractor shall employ permanently on the site a fully trained Medical Aide, who shall be engaged solely on medical duties.

3. The location of the medical room and any other arrangements shall be made known to all employees by posting on prominent locations suitable notices in the site.

4. The Contractor's arrangement to comply with the Section shall be subject to the approval of the Engineer and also to the approval of any qualified Medical Officer designated by the Government to supervise medical arrangements on the site.

Section VII. Drawing

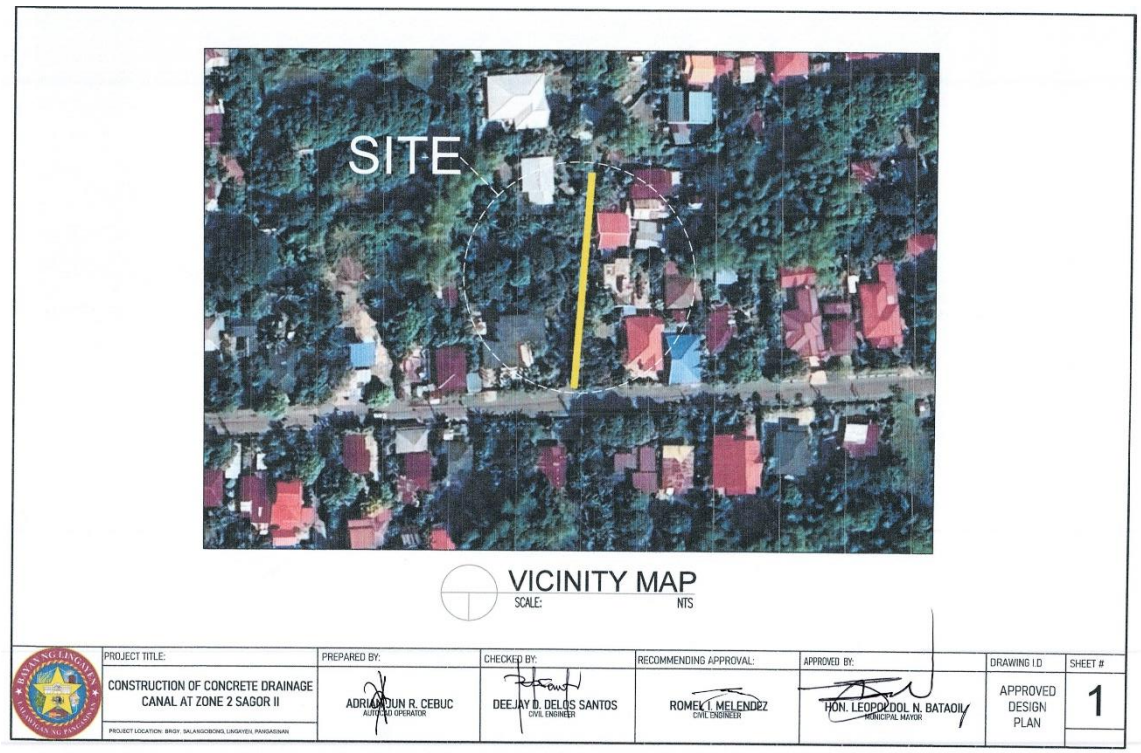

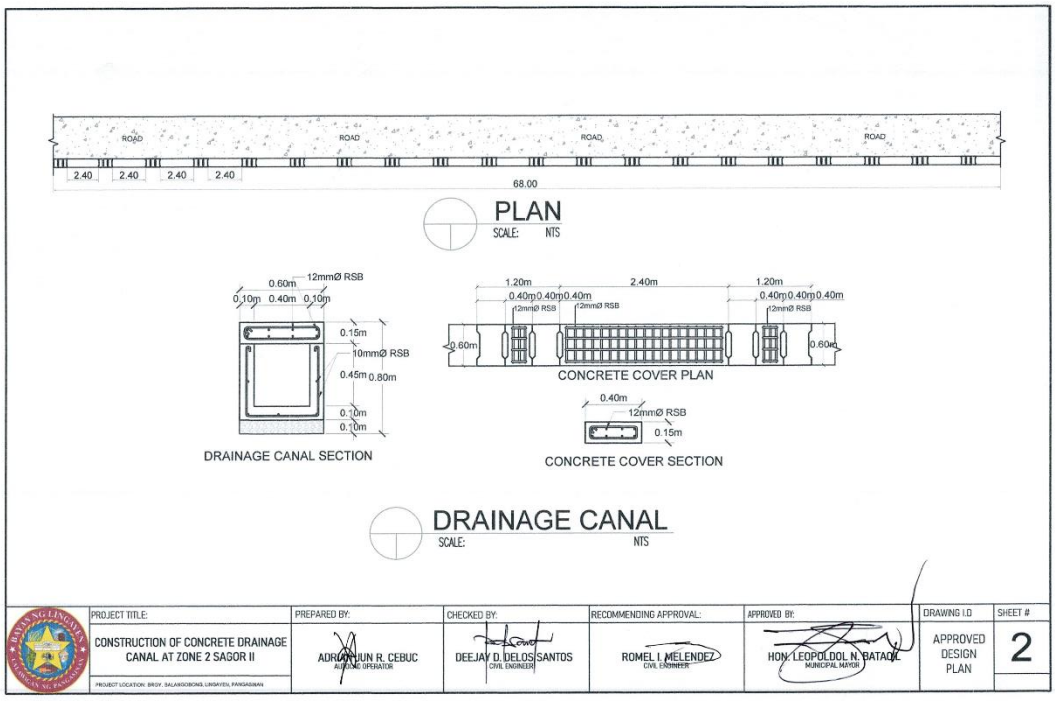

Section VIII. Bill of Quantities

Republic of the Philippines
Province of Pangasinan
Municipality of Lingayen

Bill of Quantities

CONSTRUCTION OF CONCRETE DRAINAGE CANAL AT ZONE 2, SAGUR II, BARANGAY BALANGOBONG UNDERTAKEN THROUGH EARLY PROCUREMENT ACTIVITY					
Item No.	Description	Qty.	Unit	Unit Price (Pesos)	Amount (Pesos)
	OTHER GENERAL REQUIREMENTS				
I.	Project Billboards	1.00	l.s.	In words:Pesos	In words:Pesos
II.	Construction Health and Safety	1.00	l.s.	In words:Pesos	In words:Pesos
	CIVIL WORKS				
III.	Structure Excavation	32.64	cu.m.	In words:Pesos	In words:Pesos
IV.	Gravel Fill	4.08	cu.m.	In words:Pesos	In words:Pesos
V.	Concrete Works	17.14	cu.m.	In words:Pesos	In words:Pesos
VI.	Reinforcing Steel & Wire Rope	1,877.04	kg	In words:Pesos	In words:Pesos
VII.	Forms & Falseworks	1.00	l.s.	In words:Pesos	In words:Pesos
TOTAL AMOUNT IN WORDS:					

Submitted by:_____ Date: _____

Section IX. Checklist of Technical and Financial Documents

Checklist of Technical and Financial Documents

Checklist of Technical and Financial Documents

Member	Member	Member	Member	Member	Vice-Chairman	Chairman

I. TECHNICAL COMPONENT ENVELOPE

(a) Valid PhilGEPS Registration Certificate (Platinum Membership) (all pages); **or**

(b) Registration certificate from Securities and Exchange Commission (SEC), Department of Trade and Industry (DTI) for sole proprietorship, or Cooperative Development Authority (CDA) for cooperatives or its equivalent document, **and**

(c) Mayor's or Business permit issued by the city or municipality where the principal place of business of the prospective bidder is located, or the equivalent document for Exclusive Economic Zones or Areas; **and**

(d) Tax clearance per E.O. No. 398, s. 2005, as finally reviewed and approved by the Bureau of Internal Revenue (BIR).

(e) Statement of the prospective bidder of all its ongoing government and private contracts, including contracts awarded but not yet started, if any, whether similar or not similar in nature and complexity to the contract to be bid; **and**

(f) Statement of the bidder's Single Largest Completed Contract (SLCC) similar to the contract to be bid, except under conditions provided under the rules; **and**

(g) Philippines Contractors Accreditation Board (PCAB) License **or**

(h) Original copy of Bid Security. If in the form of a Surety Bond, submit also a certification issued by the Insurance Commission; **or**

Original copy of Notarized Bid Securing Declaration; **and**

(e) Project Requirements, which shall include the following:

a. Organizational chart for the contract to be bid;
b. List of contractor's key personnel (*e.g.*, Project Manager, Project Engineers, Materials Engineers, and Foremen), to be assigned to the contract to be bid, with their complete qualification and experience data;
c. List of contractor's major equipment units, which are owned, leased, and/or under purchase agreements, supported by proof of ownership or certification of availability of equipment from the equipment lessor/vendor for the duration of the project, as the case may be; **and**

(f) Original duly signed Omnibus Sworn Statement (OSS);

and if applicable, Original Notarized Secretary's Certificate in case of a corporation, partnership, or cooperative; or Original Special Power of Attorney of all members of the joint venture giving full power and authority to its officer to sign the OSS and do acts to represent the Bidder.

(k) The prospective bidder's audited financial statements, showing, among others, the prospective bidder's total and current assets and liabilities, stamped "received" by the BIR or its duly accredited and authorized institutions, for the preceding calendar year which should not be earlier than two (2) years from the date of bid submission; and

(l) The prospective bidder's computation of Net Financial Contracting Capacity (NFCC).

Class "B" Documents

(m) If applicable, duly signed joint venture agreement (JVA) in accordance with RA No joint venture is already in existence;

or

duly notarized statements from all the potential joint venture partners stating that th the provisions of the JVA in the instance that the bid is successful.

Checklist of Financial Documents

Member	Member	Member	Member	Member	Vice-	Chairman

II. FINANCIAL COMPONENT ENVELOPE

(m) Original of duly signed and accomplished Financial Bid Form; **and**

(n) Original of duly signed Bid Prices in the Bill of Quantities; **and**

(o) Duly accomplished Detailed Estimates Form, including a summary sheet indicating the unit prices of construction materials, labor rates, and equipment rentals used in coming up with the Bid; **and**

(q) Cash Flow.

Remarks: ( ) Eligible ( ) Ineligible

Section XI. Bid Forms

Bid Form

BIDFORM

Date :_____

To: Bids and Awards Committee
Local Government Unit of Lingayen
Municipal Hall Building,
Lingayen, Pangasinan, 2401

Having examined the Philippine Bidding Documents (PBDs) including the Supplemental or Bid Bulletin Numbers *[insert numbers],* the receipt of which is hereby duly acknowledged, we, the undersigned, declare that:

a. We have no reservation to the PBDs, including the Supplemental or Bid Bulletins, for the Procurement Project: *[insert name of contract];*

b. We offer to execute the Works for this Contract in accordance with the PBDs;

c. The total price of our Bid in words and figures, excluding any discounts offered below is: *[insert information]*;

d. The discounts offered and the methodology for their application are: *[insert information]*;

e. The total bid price includes the cost of all taxes, such as, but not limited to: *[specify the applicable taxes, e.g. (i) value added tax (VAT), (ii) income tax, (iii) local taxes, and (iv) other fiscal levies and duties],* which are itemized herein and reflected in the detailed estimates,

f. Our Bid shall be valid within the a period stated in the PBDs, and it shall remain binding upon us at any time before the expiration of that period;

g. If our Bid is accepted, we commit to obtain a Performance Security in the amount of *[insert percentage amount]* percent of the Contract Price for the due performance of the Contract, or a Performance Securing Declaration in lieu of the the allowable forms of Performance Security, subject to the terms and conditions of issued GPPB guidelines[12] for this purpose;

h. We are not participating, as Bidders, in more than one Bid in this bidding process, other than alternative offers in accordance with the Bidding Documents;
i. We understand that this Bid, together with your written acceptance thereof included in your notification of award, shall constitute a binding contract between us, until a formal Contract is prepared and executed; and

j. We understand that you are not bound to accept the Lowest Calculated Bid or any other Bid that you may receive.

k. We likewise certify/confirm that the undersigned, is the duly authorized representative of the bidder, and granted full power and authority to do, execute and perform any and all acts necessary to participate, submit the bid, and to sign and execute the ensuing contract for the [Name of Project] of the [Name of the Procuring Entity*].*

l. We acknowledge that failure to sign each and every page of this Bid Form, including the Bill of Quantities, shall be a ground for the rejection of our bid.

Name:

_____

_____

Legal Capacity:

_____

_____

Signature:

_____

_____

Duly authorized to sign the Bid for and behalf of: _____

Date: _____

Omnibus Sworn Statement

REPUBLICOFTHEPHILIPPINES
)CITY/MUNICIPALITYOF_____)
S.S.

AFFIDAVIT

I, [Name of Affiant], of legal age, [Civil Status], [Nationality], and residing at [Address of Affiant], after having been duly sworn in accordance with law, do hereby depose and state that:

1. *[Select one, delete the other:]*

   [If a sole proprietorship:] I am the sole proprietor or authorized representative of [Name of Bidder] with office address at [address of Bidder];

   [If a partnership, corporation, cooperative, or joint venture:] I am the duly authorized and designated representative of [Name of Bidder] with office address at [address of Bidder];

2. *[Select one, delete the other:]*

   [If a sole proprietorship:] As the owner and sole proprietor, or authorized representative of [Name of Bidder], I have full power and authority to do, execute and perform any and all acts necessary to participate, submit the bid, and to sign and execute the ensuing contract for [Name of the Project] of the [Name of the Procuring Entity], as shown in the attached duly notarized Special Power of Attorney;

   [If a partnership, corporation, cooperative, or joint venture:] I am granted full power and authority to do, execute and perform any and all acts necessary to participate, submit the bid, and to sign and execute the ensuing contract for [Name of the Project] of the [Name of the Procuring Entity], as shown in the attached [state title of attached document showing proof of authorization (e.g., duly notarized Secretary's Certificate, Board/Partnership Resolution, or Special Power of Attorney, whichever is applicable;)];

3. [Name of Bidder] is not "blacklisted" or barred from bidding by the Government of the Philippines or any of its agencies, offices, corporations, or Local Government Units, foreign government/foreign or international financing institution whose blacklisting rules have been recognized by the Government Procurement Policy Board, **by itself or by relation, membership, association, affiliation, or controlling interest with another blacklisted**

person or entity as defined and provided for in the Uniform Guidelines on Blacklisting;

4. Each of the documents submitted in satisfaction of the bidding requirements is an authentic copy of the original, complete, and all statements and information provided therein are true and correct;

5. [Name of Bidder] is authorizing the Head of the Procuring Entity or its duly authorized representative(s) to verify all the documents submitted;

6. *[Select one, delete the rest:]*

   [If a sole proprietorship:] The owner or sole proprietor is not related to the Head of the Procuring Entity, members of the Bids and Awards Committee (BAC), the Technical Working Group, and the BAC Secretariat, the head of the Project Management Office or the end-user unit, and the project consultants by consanguinity or affinity up to the third civil degree;

   [If a partnership or cooperative:] None of the officers and members of *[Name of Bidder]* is related to the Head of the Procuring Entity, members of the Bids and Awards Committee (BAC), the Technical Working Group, and the BAC Secretariat, the head of the Project Management Office or the end-user unit, and the project consultants by consanguinity or affinity up to the third civil degree;

   [If a corporation or joint venture:] None of the officers, directors, and controlling stockholders of *[Name of Bidder]* is related to the Head of the Procuring Entity, members of the Bids and Awards Committee (BAC), the Technical Working Group, and the BAC Secretariat, the head of the Project Management Office or the end-user unit, and the project consultants by consanguinity or affinity up to the third civil degree;

7. *[Name of Bidder]* complies with existing labor laws and standards; and

8. *[Name of Bidder]* is aware of and has undertaken the responsibilities as a Bidder in compliance with the Philippine Bidding Documents, which includes:

   a. Carefully examining all of the Bidding Documents;
   b. Acknowledging all conditions, local or otherwise, affecting the implementation of the Contract;
   c. Making an estimate of the facilities available and needed for the contract to be bid, if any; and
   d. Inquiring or securing Supplemental/Bid Bulletin(s) issued for the *[Name of the Project]*.

9. *[Name of Bidder]* did not give or pay directly or indirectly, any commission, amount, fee, or any form of consideration, pecuniary or otherwise, to any person or official, personnel or representative of the government in relation to any procurement project or activity.
10. **In case advance payment was made or given, failure to perform or deliver any of the obligations and undertakings in the contract shall be sufficient grounds to constitute criminal liability for Swindling (Estafa) or the commission of fraud with unfaithfulness or abuse of confidence through misappropriating or converting any payment received by a person or entity under an obligation involving the duty to deliver certain goods or services, to the prejudice of the public and the government of the Philippines pursuant to Article 315 of Act No. 3815 s. 1930, as amended, or the Revised Penal Code.**

IN WITNESS WHEREOF, I have hereunto set my hand this_____day of, 20_____at

_____, Philippines.

[Insert NAME OF BIDDER OR ITS AUTHORIZED REPRESENTATIVE]

[Insert signatory's legal capacity]

Affiant

[Jurat]

[Format shall be based on the latest Rules on Notarial Practice]

Bid Securing Declaration Form

[shall be submitted with the Bid if bidder opts to provide this form of bid security]

REPUBLIC OF THE PHILIPPINES)
CITY OF_____) S.S.

BID SECURING DECLARATION

Project Title: _____

To: *Bids and Awards Committee*
Local Government Unit of Lingayen
Municipal Hall Building
Lingayen, Pangasinan, 2401

I/We, the undersigned, declare that:

1. I/We understand that, according to your conditions, bids must be supported by a Bid Security, which may be in the form of a Bid Securing Declaration.

2. I/We accept that: (a) I/we will be automatically disqualified from bidding for any procurement contract with any procuring entity for a period of two (2) years upon receipt of your Blacklisting Order; and, (b) I/we will pay the applicable fine provided under Section 6 of the Guidelines on the Use of Bid Securing Declaration, within fifteen (15) days from receipt of the written demand by the procuring entity for the commission of acts resulting to the enforcement of the bid securing declaration under Sections 23.1(b), 34.2, 40.1 and 69.1, except 69.1(f),of the IRR of RA No. 9184; without prejudice to other legal action the government may undertake.

3. I/We understand that this Bid Securing Declaration shall cease to be valid on the following circumstances:

    a. Upon expiration of the bid validity period, or any extension thereof pursuant to your request;
    b. I am/we are declared ineligible or post-disqualified upon receipt of your notice to such effect, and (i) I/we failed to timely file a request for reconsideration or (ii) I/we filed a waiver to avail of said right; and
    c. I am/we are declared the bidder with the Lowest Calculated Responsive Bid, and I/we have furnished the performance security and signed the Contract.

IN WITNESS WHEREOF, I/We have hereunto set my/our hand/s this_day of *[month] [year]* at *[place of execution]*.

[Insert NAME OF BIDDER OR ITS AUTHORIZED REPRESENTATIVE]

[Insert signatory's legal capacity]

Affiant

[Jurat]

[Format shall be based on the latest Rules on Notarial Practice]

STATEMENT OF SINGLE LARGEST COMPLETED CONTRACT

Name of Contract/Location Project Cost	a. Owner Name b. Address c. Telephone Nos.	Nature of works	Contractor's Role		a. Date Awarded b. Date of Proceed c. Cert. of Acceptance	Amount at Award
			Description	%		

Submitted by:

(Printed Name & signature of Bidder's Authorized Representative)

Designation:_____

STATEMENT OF ALL ONGOING PROJECTS

Name of Contract/Location Project Cost	a. Owner Name b. Address c. Telephone Nos.	Nature of works	Contractor's Role		a. Date Awarded b. Date of contract c. Date of Proceed d. Contract Duration	% of Accomplistment		Value of Outstanding Works
			Description	%		Planned	%	
					TOTAL----------			

(Printed Name & signature of Bidder's Authorized Representative)

Designation: Manager